

SIRIO Luce
Italian Style

2021

INTRODUCTION

SIRIO Luce is taking the mission to catch the star light and to shift it into our night times.

Any lighting system has a task overall relevant, to reproduce as much as possible natural effects, to generate an environment supporting our well being.

The human as central point of the system, the natural appearance of his surrounding as target.

SIRIO Luce is taking into proper attention energetic aspects as well as biological compatibility to light in term of glare control, colour rendering, right balance of shades and bright area.

A mission which is based on an accurate selection of products offered in a wide range, extended from indoor to outdoor areas and all of them, equipped with best light sources and controlled by high quality electrical components. In a very busy market, a real star: SIRIO Luce.

SIRIO Luce implementa la missione di catturare la luce delle stelle e riprodurla nelle ore notturne.

Ogni sistema di illuminazione ha un compito rilevante, riprodurre il più possibile gli effetti naturali per generare un ambiente, che corrobora il nostro benessere.

L'uomo come punto centrale del sistema, l'aspetto più naturale possibile del suo ambiente, l'obiettivo.

SIRIO Luce prende in esame gli aspetti energetici e la compatibilità biologica con la luce, valuta attentamente gli indici di abbagliamento, seleziona le rese cromatiche e bilancia i contrasti tra luce ed ombre.

Una missione che si basa su un'accurata selezione dei prodotti, offerti in un'ampia gamma da interni ed esterni, equipaggiati dalle migliori sorgenti luminose e controllati da componenti elettrici di alta qualità.

In un mercato molto saturo, una vera stella: SIRIO Luce.

DESIGN

Designing a complete and suitable luminous environment is more complicated than simply selecting lighting fixtures.

With the help of experience and expertise Sirio is committed to developed spatial patterns of light, shade, and color that requires thinking about light in three dimensions.

Such recognition implies understanding and sensitivity to techniques that create an environment where observers react with feelings of pleasantness and well-being through the use of silhouette, color tone, and other patterns of spatial light.

Progettare un ambiente, rendendolo confortevole e suggestivo, è un compito molto più qualificato che la semplice selezione di prodotti di illuminazione.


Sirio Luce, con l'esperienza dei suoi progettisti, realizza ambienti con il giusto equilibrio di luci ed ombre, determinando una corretta definizione degli spazi.

Tale capacità si basa su una corretta interpretazione emozionale e tecnica, valutando, con specifica sensibilità, la necessità di realizzare ambienti confortevoli e funzionali, nei quali il benessere visivo trova una necessaria rilevanza




INTERIOR TECHNICAL


SPOT LIGHT



SR-7468/7W



SR-7468/12W



SR-7468 /18W

Product Code: SR-7468-2.5/7W

Watt: 7W
Kelvin: 3000K/4000K/6400K
Lumens: 630lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-7468-3/12W

Watt: 12W
Kelvin: 3000K/4000K/6400K
Lumens: 1080lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H


Product Code: SR-7468-4/18W

Watt: 18W
Kelvin: 3000K/4000K/6400K
Lumens: 1620lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



- ▶ PHILIPS driver and CREE led
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SPOT LIGHT

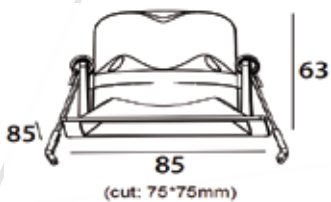

SR-2008/10W

Product Code: SR-2008/10W

Watt: 10W

Kelvin: 3000K/4000K/6400K

Lumens: 900lm

Beam Angle: 15°/25°/38°/60°

CRI: >80

Input: AC 200-240V~50/60Hz

Ambient Temperature: 25°C~50°C


Lamp Life: 30,000H



- ▶ LIFUD driver. Other brands available on request
- ▶ LUMILEDS COB
- ▶ Other frame finishing color available on request based on RAL

SR-2008

SPOT LIGHT

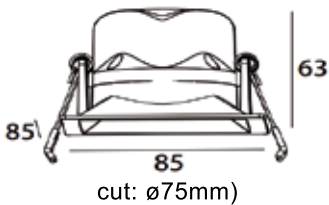

SR-2006/10W

Product Code: SR-2006/10W

Watt: 10W

Kelvin: 3000K/4000K/6400K

Lumens: 900lm

Beam Angle: 15°/25°/38°/60°

CRI: >80

Input: AC 200-240V~50/60Hz


Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H




- ▶ LIFUD driver. Other brands available on request
- ▶ LUMILEDS COB
- ▶ Other frame finishing color available on request based on RAL


SPOT LIGHT

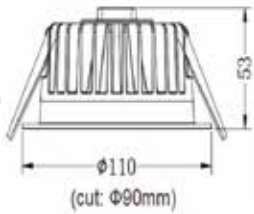


SR-213/12W

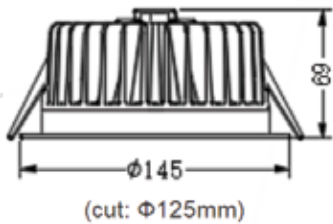

SR-213/20W

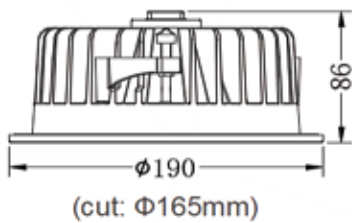

SR-213/30W

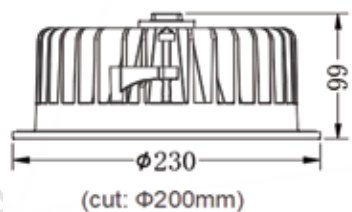

SR-213/38W

Product Code: SR-213/12W
 Watt: 12W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1050lm
 Beam Angle: 90°
 CRI: >80
 Input: AC 200-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-213/20W
 Watt: 20W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1800lm
 Beam Angle: 90°
 CRI: >80
 Input: AC 200-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-213/30W
 Watt: 30W
 Kelvin: 3000K/4000K/6400K
 Lumens: 2700lm
 Beam Angle: 90°
 CRI: >80
 Input: AC 200-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H


Product Code: SR-213/38W
 Watt: 38W
 Kelvin: 3000K/4000K/6400K
 Lumens: 3400lm
 Beam Angle: 90°
 CRI: >80
 Input: AC 200-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H




- ▶ OSRAM driver and CREE led chip
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-213-218


SPOT LIGHT

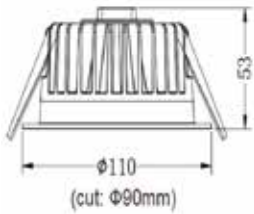


SR-203/10W

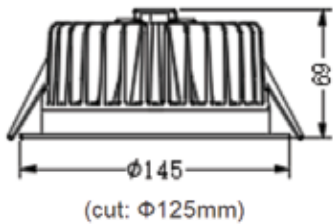

SR-203/18W

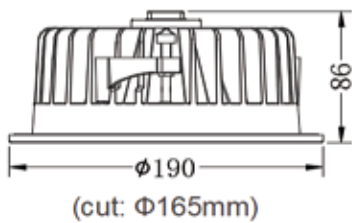

SR-203/24W

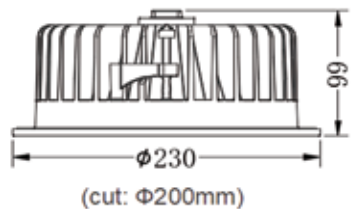

SR-203/30W

Product Code: SR-203/10W
Watt: 10W
Kelvin: 3000K/4000K/6400K
Lumens: 1050lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-203/18W
Watt: 18W
Kelvin: 3000K/4000K/6400K
Lumens: 1800lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-203/24W
Watt: 24W
Kelvin: 3000K/4000K/6400K
Lumens: 2700lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H


Product Code: SR-203/30W
Watt: 30W
Kelvin: 3000K/4000K/6400K
Lumens: 3400lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H




- ▶ LIFUD driver and CREE led chip
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-203-208

SPOT LIGHT

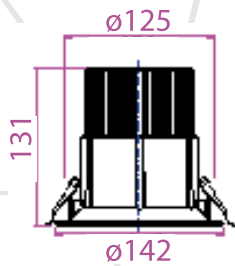

SR-74026/28W

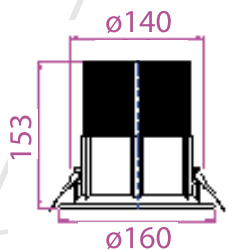

SR-74026/42W

Product Code: SR-74026/28W

Watt: 28W
Kelvin: 3000K/4000K/6400K
Lumens: 2500lm
Beam Angle: 20°/40°/60°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-74026/42W


Watt: 42W
Kelvin: 3000K/4000K/6400K
Lumens: 3750lm
Beam Angle: 20°/40°/60°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H





- ▶ PHILIPS driver and CREE led chip
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-74026

SPOT LIGHT

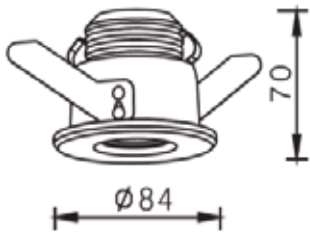

SR-7495/7W

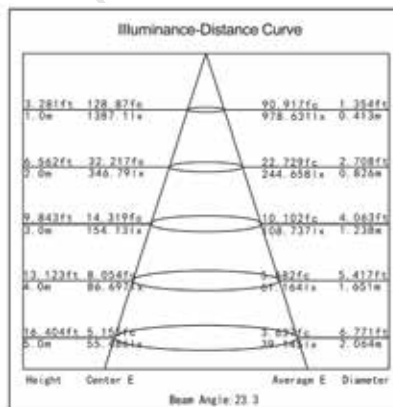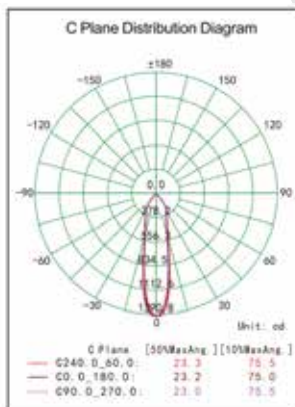

Product Code: SR-7495/7W
 Watt: 7W
 Kelvin: 3000K/4000K/6400K
 Lumens: 542lm
 Beam Angle: 24°
 CRI: >80
 Input: AC 200-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-7495/7W

SURFACE DOWN LIGHT



Φ170*38

SR-1081-6ES/12W




Φ225*38

SR-1081-8ES/18W



Φ300*38

SR-1081-8ES/24W

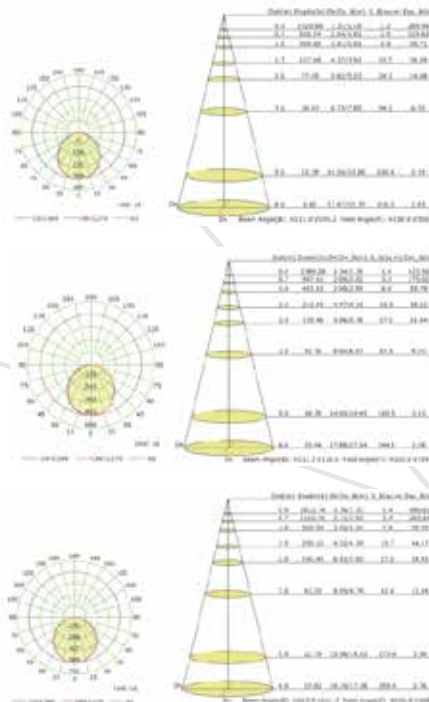

Product Code: SR-1081-6ES/12W

Watt: 12W
 Kelvin: 3000K/4000K/6400K
 Lumens: 760lm/770lm/780lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1081-8ES/18W

Watt: 18W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1150lm/1250lm/1350lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1081-8ES/24W

Watt: 24W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1600lm/1700lm/1800lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL


SR-1081-ES

SURFACE DOWN LIGHT



170*170*38

SR-1082-6ES/12W




225*225*38

SR-1082-8ES/18W



300*300*38

SR-1082-8ES/24W

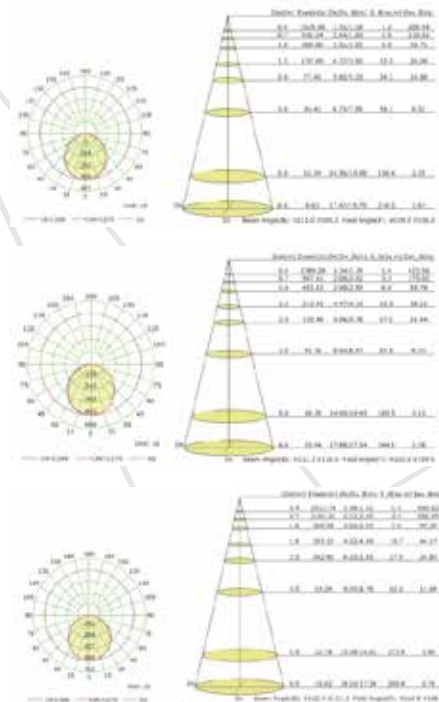

Product Code: SR-1082-6ES/12W

Watt: 12W
Kelvin: 3000K/4000K/6400K
Lumens: 760lm/770lm/780lm
Beam Angle: 120°
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-1082-8ES/18W

Watt: 18W
Kelvin: 3000K/4000K/6400K
Lumens: 1150lm/1250lm/1350lm
Beam Angle: 120°
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-1082-8ES/24W

Watt: 24W
Kelvin: 3000K/4000K/6400K
Lumens: 1600lm/1700lm/1800lm
Beam Angle: 120°
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-1082-ES

RECESSED DOWNLIGHT



Φ170*20



Φ160

SR-1073-6ES/12W



Φ225*20



Φ206

SR-1073-8ES/18W




Φ300*20



Φ280

SR-1073-10ES/24W

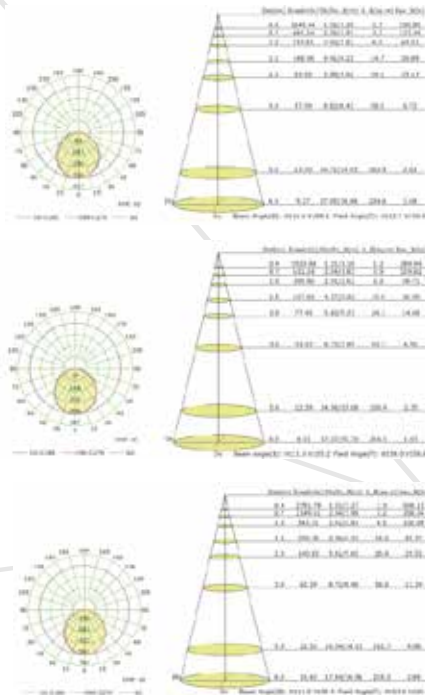

Product Code: SR-1073-6ES/12W

Watt: 12W

Kelvin: 3000K/4000K/6400K

Lumens: 760lm/770lm/780lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1073-8ES/18W

Watt: 18W

Kelvin: 3000K/4000K/6400K

Lumens: 1100lm/1150lm/1200lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1073-10ES/24W

Watt: 24W

Kelvin: 3000K/4000K/6400K

Lumens: 1600lm/1650lm/1700lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H




- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-1073-ES

PANEL LED



MOUNTING OPTIONS




1) Insert construction




2) Hanging construction



3) Surface mount construction

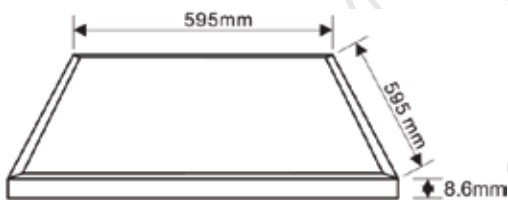

SR-1081-8ES/24W

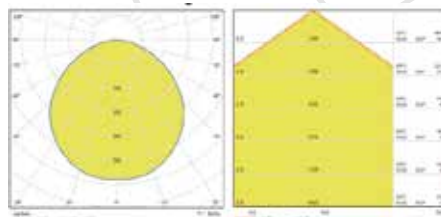

Product Code: SR-PN008-6ES/48W

Watt: 48W

Kelvin: 3000K/4000K/6400K

Lumens: 4200lm/4300lm/4400lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H




IP 20



- ▶ Dimmable and emergency on request
- ▶ RAL 9016 other RAL color on request
- ▶ IP44 and IP65 on request


SR-PN008

RECESSED DOWNLIGHT

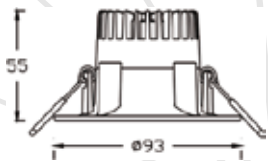


Φ75

SR-6331-2SL/8W

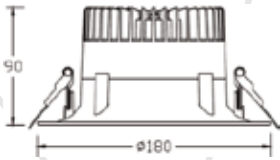


Φ160

SR-6331-6SL/15W

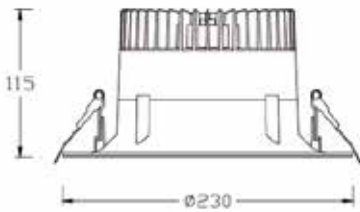

Φ200

SR-6331-8SL/25W

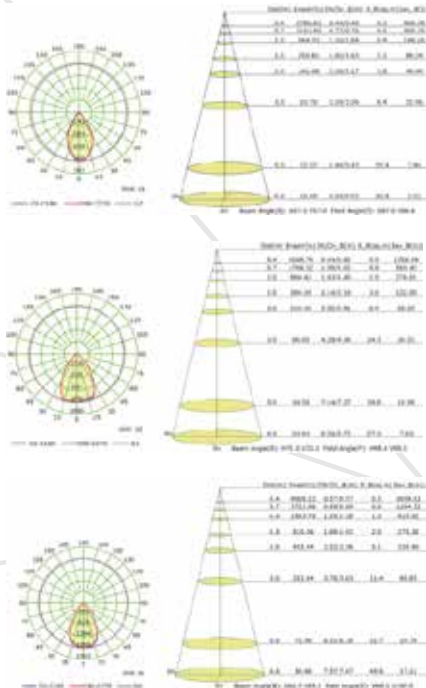

Product Code: SR-6331-2SL/8W

Watt: 8W
 Kelvin: 3000K/4000K/6400K
 Lumens: 560lm/600lm/650lm
 Beam Angle: 60°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-6331-6SL/15W

Watt: 15W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1230lm/1300lm/1400lm
 Beam Angle: 60°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-6331-8SL/25W

Watt: 25W
 Kelvin: 3000K/4000K/6400K
 Lumens: 2200lm/2330lm/2500lm
 Beam Angle: 60°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-6331-SL

RECESSED DOWNLIGHT



170*170*20



155*155

SR-1081-6ES/12W



225*225*20



205*205

SR-1081-8ES/18W




300*300*20



280*280

SR-1081-8ES/24W

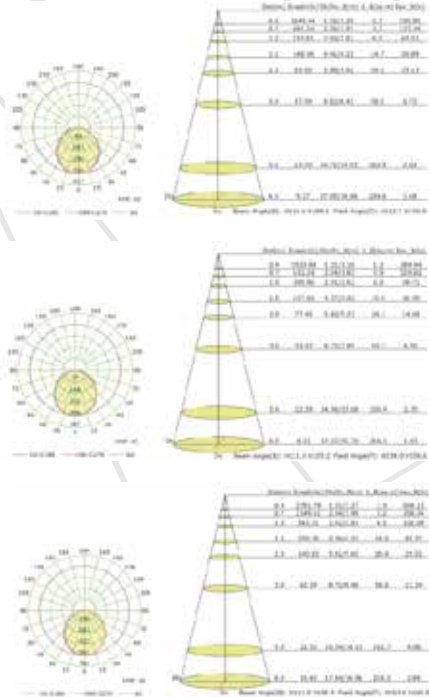

Product Code: SR-1081-6ES/12W

Watt: 12W
 Kelvin: 3000K/4000K/6400K
 Lumens: 760lm/770lm/780lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1081-8ES/18W

Watt: 18W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1100lm/1150lm/1200lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1081-8ES/24W

Watt: 24W
 Kelvin: 3000K/4000K/6400K
 Lumens: 1600lm/1650lm/1700lm
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H




- ▶ Any brands of driver available on request
- ▶ Dimmable Driver On Request
- ▶ Other frame finishing color available on request based on RAL

SR-1074ES



CUSTOMIZED INTERIOR SOLUTIONS




SIRIO Luce provides one of its best performances in the decorative fixtures field, either architectural or classic: from sketch to the CAD drawing and shop drawings, SIRIO Luce can supply any product totally customized in size, shape, finishing.
The Interior Designer creativity stays free.
SIRIO Luce will materialize the idea.

Nel campo del decorativo architet-
turale e classico, SIRIO Luce ga-
rantisce una delle sue migliori
capacità: dallo schizzo al disegno
CAD ai disegni costruttivi completi,
SIRIO Luce può fornire ogni pro-
dotto richiesto in dimensione, stile,
finitura, totalmente customizzati.
La creatività dell'Interior Designer
rimane libera.
SIRIO Luce dà sostanza alla sua
idea.








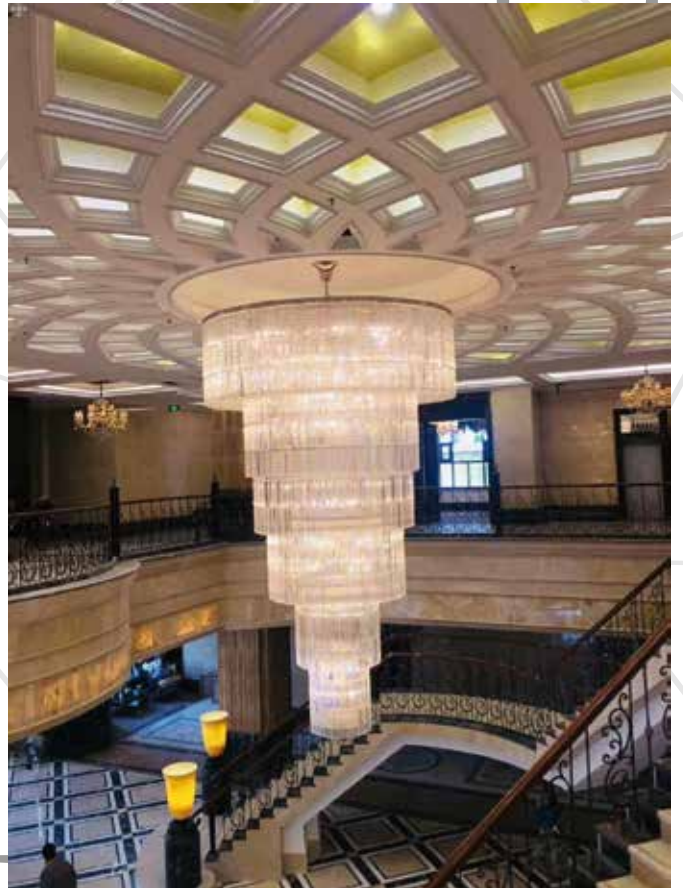



OUTDOOR LIGHTING



SURFACE WALL LIGHT

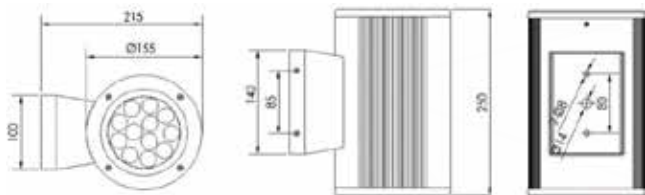

Product Code: SR-6156A-9/11W
 Watt: 11W
 Kelvin: 3000K/4000K/6400K
 Beam Angle: DOWN 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 50,000H

Product Code: SR-6156B-9/16W
 Watt: 16W
 Kelvin: 3000K/4000K/6400K
 Beam Angle: DOWN 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 50,000H

Product Code: SR-6156-20/26W
 Watt: 26W COB
 Kelvin: 3000K/4000K/6400K
 Beam Angle: DOWN 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 50,000H






- ▶ CREE LED
- ▶ Die cast aluminium body
- ▶ Driver built in



SR-6156

SURFACE WALL LIGHT

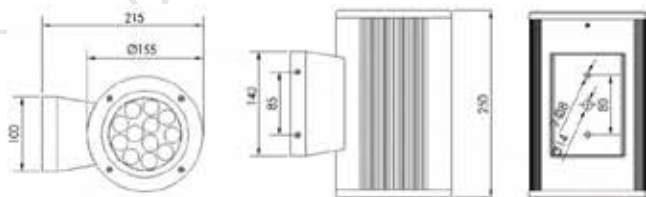

Product Code: SR-6155A-18//21W

Watt: 21W
 Kelvin: 3000K/4000K/6400K
 Beam Angle: UP & DOWN
 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 50,000H

Product Code: SR-6155B-18/36W


Watt: 36W
 Kelvin: 3000K/4000K/6400K
 Beam Angle: UP & DOWN
 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 50,000H



- ▶ CREE LED
- ▶ Driver built in

SR-6155

SURFACE WALL LIGHT

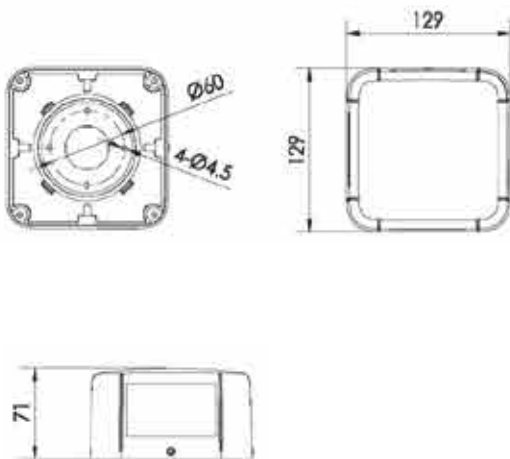

Product Code: SR-3210B-2/4W

Watt: 4W
Kelvin: 3000K/4000K/5000K
Beam Angle: 2°/60°
CRI: >80
Input: AC 100-240V
Ambient Temperature: -25°C~50°C
Lamp Life: 50,000H



Product Code: SR-3210B-4/8W

Watt: 8W
Kelvin: 3000K/4000K/5000K
Beam Angle: 2°/60°
CRI: >80
Input: AC 100-240V
Ambient Temperature: -25°C~50°C
Lamp Life: 50,000H



- ▶ LED SMD
- ▶ Driver included
- ▶ Die cast aluminium body

SURFACE WALL LIGHT

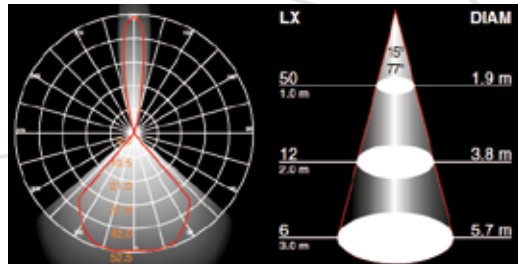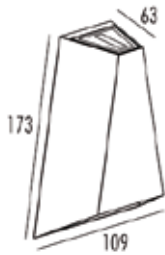

Product Code: SR-2553/2x4.5W

Watt: 2x4.5W

Kelvin: 3000K

Beam Angle: 15°/78°

CRI: >80

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C




Lamp Life: 30,000H



- ▶ CREE LED
- ▶ Driver hep (build in)
- ▶ Die cast aluminium body

SR-2553 LED

SURFACE WALL LIGHT

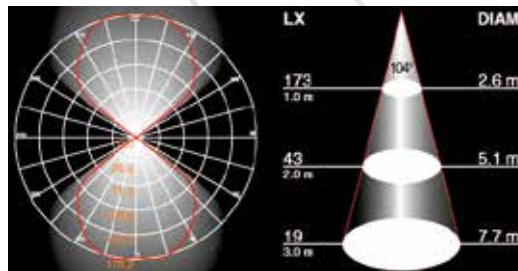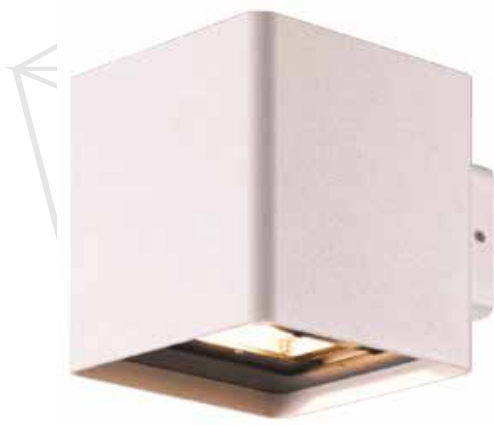

Product Code: SR-2542 /2x5W

Watt: 2x5W

Kelvin: 3000K

Beam Angle: 104°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



- ▶ LED CREE1304
- ▶ Driver hep

SR-2542




SURFACE WALL LIGHT



SR-2841 COB



SR-2851 COB

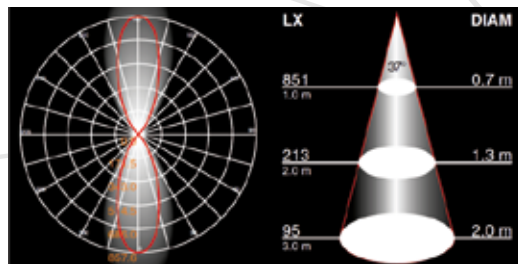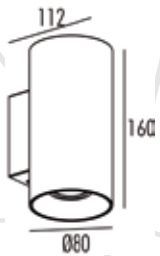

Product Code: SR-2851 COB/2x7W

Watt: 2x7W
 Kelvin: 3000K
 Lumens: 890lm
 Beam Angle: 37°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2841 COB/2x7W

Watt: 2x7W
 Kelvin: 3000K
 Lumens: 890lm
 Beam Angle: 37°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H



- ▶ CREE COB 1304
- ▶ Driver hep
- ▶ Die cast aluminium body

SR-2841 COB
SR-2851 COB



SURFACE WALL LIGHT



SR-2841 COB



SR-2851 COB

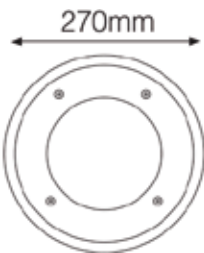

Product Code: SR-2300/20W
Watt: 20W E27 (E27)
Kelvin: 3000K
Lumens: 1140lm
Beam Angle: Wide
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 20,000H

Product Code: SR-2310A
Watt: 20W (E27)
Kelvin: 3000K
Lumens: 1140lm
Beam Angle: Wide
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 20,000H



- ▶ Die cast aluminium body
- ▶ E27 lamp holder led version available on request
- ▶ Polycarbonate diffuser



SURFACE WALL LIGHT



SR-2200



SR-2310B



Product Code: SR-2200/20W

Watt: 20W E27 (E27)

Kelvin: 3000K

Lumens: 1140lm

Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 20,000H

Product Code: SR-2310B/20W

Watt: 20W (E27)

Kelvin: 3000K

Lumens: 1140lm

Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 20,000H



- ▶ Die cast aluminium body
- ▶ E27 lamp holder led version available on request
- ▶ Polycarbonate diffuser

RECESSED WALL LIGHT



SR-9300



SR-9310



SR-9320

Product Code: SR-9300/2x1W


Watt: 2x1W
 Kelvin: 3000K
 Lumens: 220lm
 Beam Angle: Wide
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-9310/4x1W

Watt: 4x1W
 Kelvin: 3000K
 Lumens: 440lm
 Beam Angle: Wide
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-9320/6x1W

Watt: 6x1W
 Kelvin: 3000K
 Lumens: 660lm
 Beam Angle: Wide
 CRI: >80
 Input: AC 100-240V~50/60Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

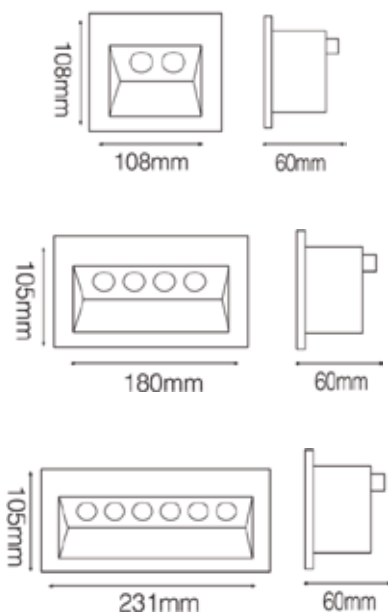

- ▶ LED SMD CRI 85
- ▶ Driver CE certified
- ▶ Body die cast aluminium, plastic recessed box



SR-9320
SR-9310
SR-9300




RECESSED WALL LIGHT




SR-1121A



SR-1122A

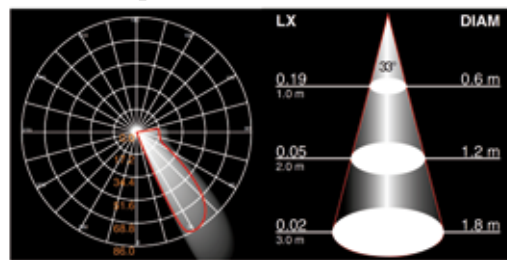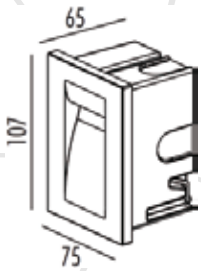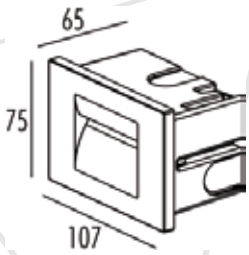

SR-1121A

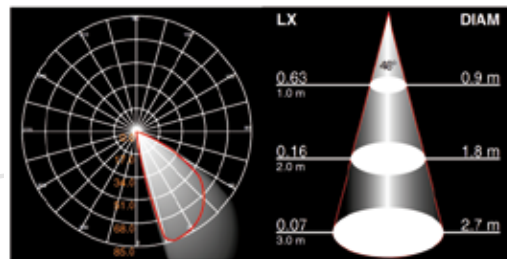

SR-1122A

Product Code: SR-1121A/3.6W

Watt: 3.6W
 Kelvin: 3000K
 Lumens: 75lm
 Beam Angle: 33°
 CRI: >80
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1122A XXXXXXX

Watt: 3.6W
 Kelvin: 3000K
 Lumens: 99lm
 Beam Angle: 48°
 CRI: >80
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H



- ▶ LED PHILIPS 3014
- ▶ Driver built in (er brand)
- ▶ Die cast aluminium body and recessed plastic box
- ▶ PC diffuser

**SR-1121A
SR-1122A**




RECESSED WALL LIGHT



SR-2772LED



SR-2771LED

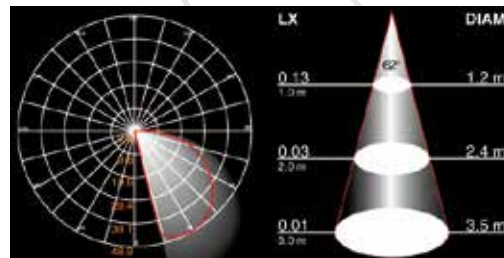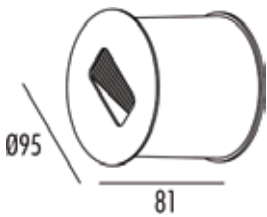

Product Code: SR-2772LED/1x3W

Watt: 1x3W
 Kelvin: 3000K
 Lumens: 54lm
 Beam Angle: 62°
 CRI: >79
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2841 COB/2x7W

Watt: 1x3W
 Kelvin: 3000K
 Lumens: 54lm
 Beam Angle: 62°
 CRI: >79
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ LED CREE XBD
- ▶ Driver er built in
- ▶ Die cast aluminium body, 30N steed cover
- ▶ Clear glass

SR-2772LED
SR-2771LED




SURFACE CEILING LIGHT



SR-5764-LED



SR-5774-LED

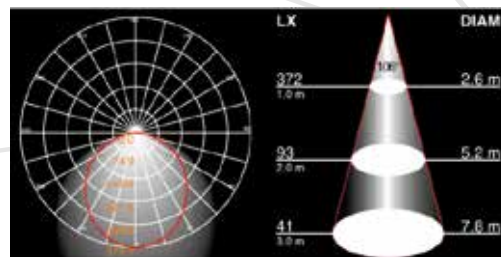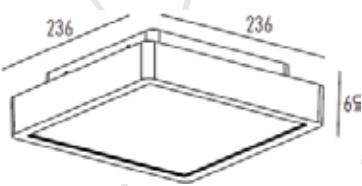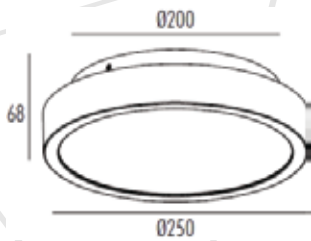

Product Code: SR-5764-LED/18W

Watt: 18W
 Kelvin: 3000K
 Lumens: 927lm
 Beam Angle: 106°
 CRI: >85
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-5774-LED/18W

Watt: 18W
 Kelvin: 3000K
 Lumens: 808lm
 Beam Angle: 106°
 CRI: >84
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ LED PHILIPS 3014
- ▶ Driver self
- ▶ Die cast aluminium body RAL
- ▶ Opal PC diffuser

**SR-5764-LED
 SR-5774-LED**




SURFACE CEILING LIGHT



SR-5683-LED



SR-5693-LED

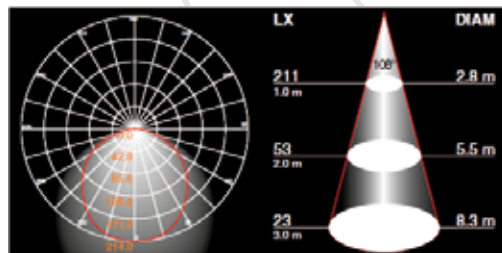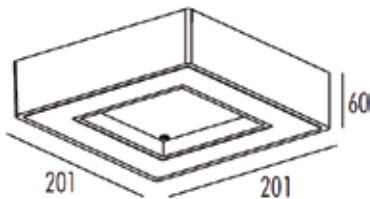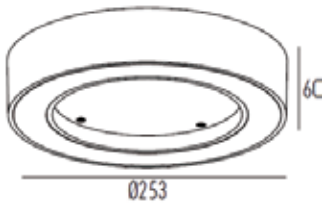

Product Code: SR-5683-LED/18W

Watt: 18W
 Kelvin: 3000K
 Lumens: 591lm
 Beam Angle: 108°
 CRI: >85
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-5693-LED/18W

Watt: 18W
 Kelvin: 3000K
 Lumens: 600lm
 Beam Angle: 109°
 CRI: >84
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H




- ▶ LED PHILIPS 3014
- ▶ No Driver
- ▶ Die cast aluminium body
- ▶ PC diffuser

**SR-5683-LED
SR-5693-LED**


FLOOD LIGHT




SR-TGD-28006

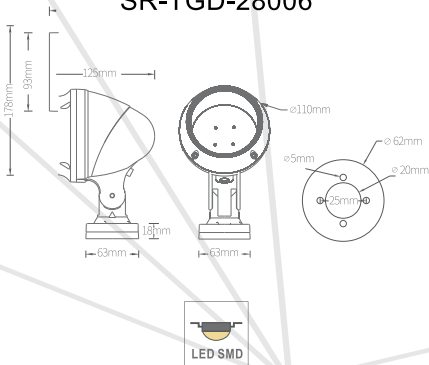


SR-TGD-28007

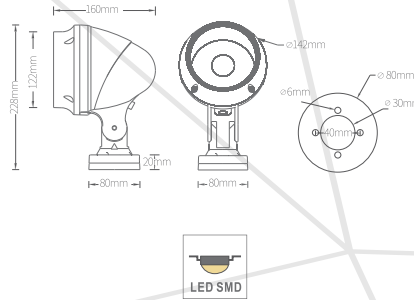

SR-TGD-28008

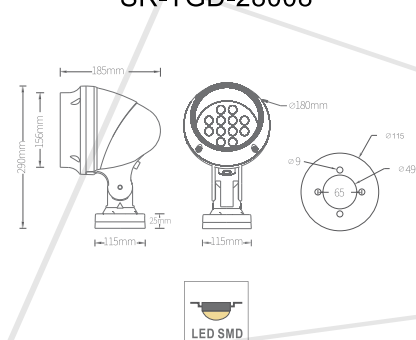

SR-TGD-28008B

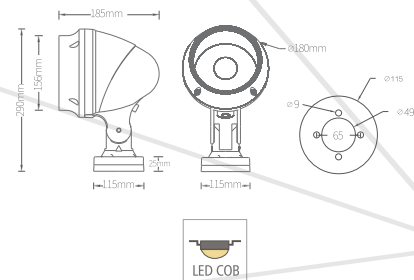

Product Code: SR-TGD-28006
 Watt: 4x2W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: 1-3W/PCS

Product Code: SR-TGD-28007
 Watt: 12x2W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: 1-3W/PCS

Product Code: SR-TGD-28008
 Watt: 18x2W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: 1-3W/PCS

Product Code: SR-TGD-28008B
 Watt: 1x30W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: OSRAM/CREE

- ▶ LED CREE OR OSRAM
- ▶ Die cast aluminium body, RAL 7046

SR-TGD-28006
 SR-TGD-28007
 SR-TGD-28008
 SR-TGD-28008B




FLOOD LIGHT



SR-TGD-28118




SR-TGD-28118B

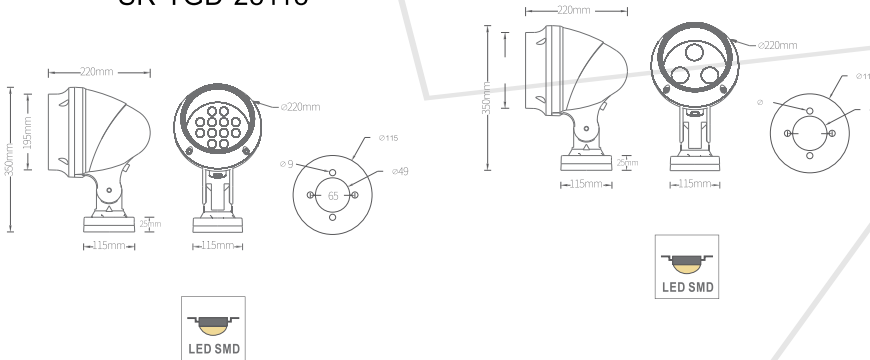

SR-TGD-28718



SR-TGD-R715

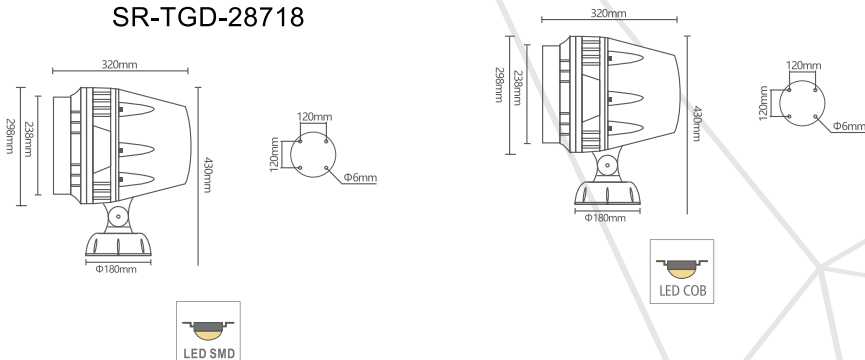

Product Code: SR-TGD-28118
 Watt: 36x22W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: 1-3W/PCS


Product Code: SR-TGD-28118B
 Watt: 3x22W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/24°/38°/45°/60°
 Input: 220-240VAC~50/60Hz

Product Code: SR-TGD-28718
 Watt: 36x22W
 Kelvin: 3000K/4000K/5500K/RGB/RGBW
 Beam Angle: with lens 15°/25°/35°/45°/60°
 Input: 220-240VAC~50/60Hz
 LED: 1-3W/PCS

Product Code: SR-TGD-R715
 Watt: 80-100W
 Kelvin: 4000K/5500K/RGB/RGBW
 Beam Angle: with lens 17°/24°/38°/60°
 Input: 220-240VAC~50/60Hz



Installation:



SR-TGD-28118
 SR-TGD-28118B
 SR-TGD-28718
 SR-TGD-R715




FLOOD LIGHT



SR-1260UB-50
SR-1260UB-30



SR-1260UB-30F

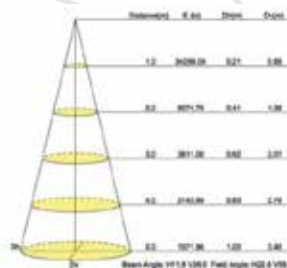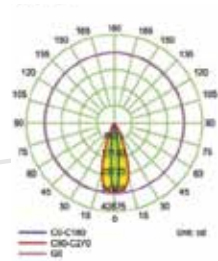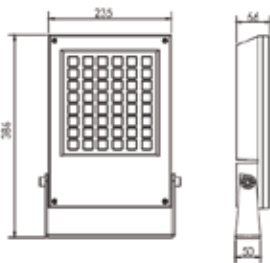

Product Code: SR-1260UB-30_/60W

Watt: 60W
Kelvin: RGB/3000K/4000K/6400K
Beam Angle: 5°/12,5°/20°/30°/48°/60°
15X30° 10x60°
CRI: >80
Input: AC 90-265V
Ambient Temperature: -25°C~50°C
Lamp Life: 50,000H

Product Code: SR-1260UB-50/102W




Watt: 102W
Kelvin: RGB/3000K/4000K/6400K
Beam Angle: 5°/12,5°/20°/30°/48°/60°
15X30° 10x60°
CRI: >80
Input: AC 90-265V
Ambient Temperature: -25°C~50°C
Lamp Life: 50,000H



- ▶ LED CREE
- ▶ Driver
- ▶ Die cast aluminium body

SR-1260UB-50
SR-1260UB-30
SR-1260UB-30F

RECESSED LINEAR LIGHT

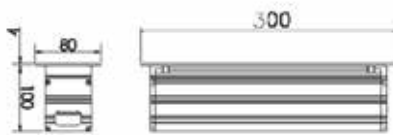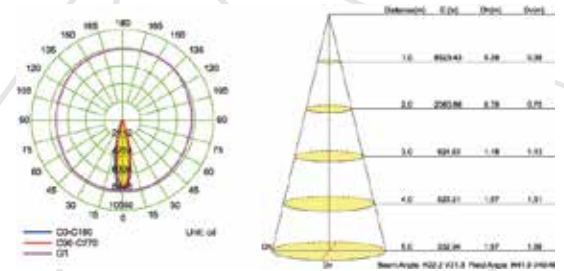

Cut Size: L292*W70*H100mm



Cut Size: L492*W70*H100mm



Cut Size: L992*W70*H100mm

Product Code: SR-2306A-18/21W (1M)


Watt: 21W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12.5°/20°/30°/45°/60°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2306A-24/28W (1M)

Watt: 28W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12.5°/20°/30°/45°/60°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2306A-36/42W (1M)



Watt: 42W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12.5°/20°/30°/45°/60°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H



- ▶ CREE LED
- ▶ 6063 aluminium alloy body, stainless steel recessed housing
- ▶ Constant current driver

SR-2306

RECESSED LINEAR LIGHT

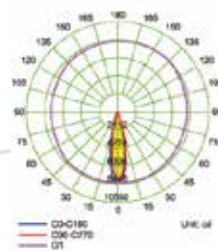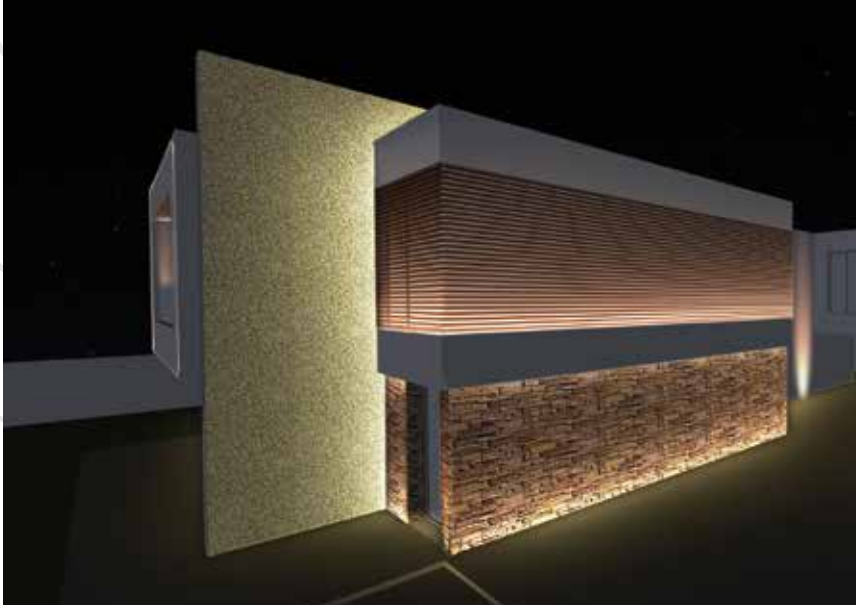

Distance	LED	Beam	Spot
1.0	800x40	6.38	0.38
2.0	2740x8	6.78	0.78
3.0	590x5	1.18	1.18
4.0	820x4	1.57	1.57
5.0	1000x4	1.97	1.97

Beam Angle: 120° ± 0.5° Field Angle: 111.8° ± 0.5°

Product Code: SR-2306A-6/7W (0.3M)

Watt: 7W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12.5°/20°/30°/45°/60°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2306A-9/11W (0.5M)

Watt: 11W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12.5°/20°/30°/45°/60°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-2306-48/11W (1M)

Watt: 21W (EPISTAR)
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 120°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 30,000H



- ▶ CREE LED
- ▶ 6063 aluminium alloy body, stainless steel recessed housing
- ▶ Constant current driver

SR-2306


RECESSED UP LIGHT








SR-2130C



SR-2130S

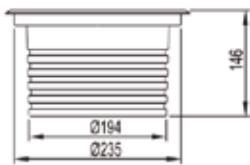

SI 2130CA-24



Product Code: SR-2130_A-18/21W

Watt: 21W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°~50°C
 Lamp Life: 50,000H

Product Code: SR-2130_B-18/30W

Watt: 30W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°~50°C
 Lamp Life: 50,000H

Product Code: SR-2130_B-24/40W

Watt: 40W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°~50°C
 Lamp Life: 50,000H



- CREE LED
- Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

**SR-2130C
SR-2130S**





RECESSED UP LIGHT



SR-2106C



SR-2106S

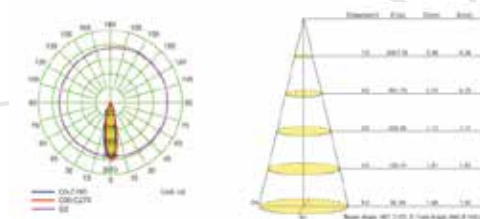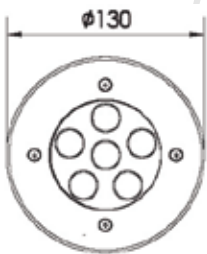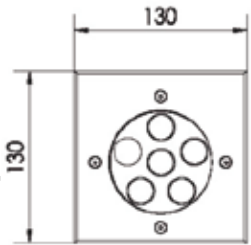

Product Code: SR-2106_A-6/7W

Watt: 7W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H

Product Code: SR-2106_B-6/12W

Watt: 12W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H



- CREE LED
- Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

SR-2106A-6/7W
SR-2106B-6/12W






RECESSED UP LIGHT



SR-2110C



SR-2110S



Product Code: SR-2110_C-6/14W

Watt: 14W
 Kelvin: RGB/3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H

Product Code: SR-2110_C-7/16W

Watt: 16W
 Kelvin: 3000K/4000K/5000K
 Beam Angle: 5°/12,5°/20°/30°/45°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H



IP67



Cutting Size: 185mm


- CREE LED
- Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

SR-2110C-6/14W
SR-2110C-7/16W




RECESSED INGROUND UP LIGHT



SR-2106C

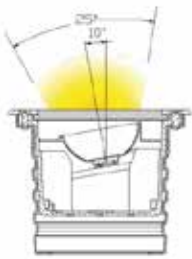

SR-2103C

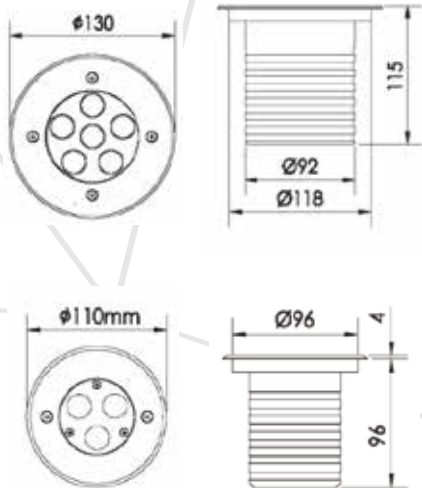

Product Code: SR-2103C-C6/6W

Watt: 6W
 Kelvin: 3000K/4000K/5000K
 Beam Angle: 25° Asy. 10°
 CRI: >80
 Input: AC 100-240V
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H
 Control: PWM/CC

Product Code: SR-2106C-C8/8W

Watt: 8W
 Kelvin: 3000K/4000K/5000K
 Beam Angle: 25° Asy. 10°
 CRI: >80
 Input: AC 100-240V ~ 50/60Hz
 Ambient Temperature: -25°C~50°C
 Lamp Life: 50,000H
 Control: DMX512/CC



Cutting Size: 118mm

- CREE LED
- Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

SR-2103C-C6/6W
SR-2106C-C8/8W


RECESSED UP LIGHT



SR-3200A



SR-3200B

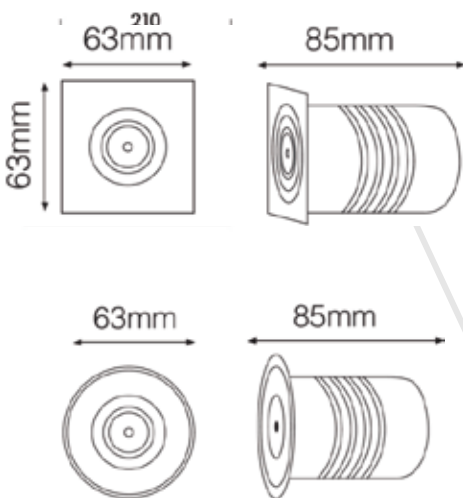

Product Code: SR-3200/1W

Watt: 1W
Kelvin: 3000K
Lumens: 100lm
Beam Angle: Narrow Beam
CRI: >80
Input: AC 100-240V ~ 50/60Hz
Ambient Temperature: -25°C~50°C
Lamp Life: 30,000H

Product Code: SR-3200A/1W

Watt: 1W
Kelvin: 3000K
Lumens: 100lm
Beam Angle: Narrow Beam
CRI: >80
Input: AC 100-240V ~ 50/60Hz
Ambient Temperature: -25°C~50°C
Lamp Life: 30,000H



Cutting Size: 55mm

**SR-3200A
SR-3200B**

PATHWALK LIGHT



SR-4400



SR-4500




Pathway



Wall and Pathway



88mm



110mm

Product Code: SR-4400
Watt: 3W
Kelvin: 3000K
Lumens: 300lm
Beam Angle: Medium
CRI: >80
Input: AC 100-240V ~ 50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-4500
Watt: 2+1W
Kelvin: 3000K
Lumens: 300lm
Beam Angle: Medium
CRI: >80
Input: AC 200-240V ~ 50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



Cutting Size: 80mm

- ▶ CREE LED
- ▶ Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

SR-4400C/3W
SR-4500C/2+1W




BOLLARDS



SR-8453 LED-200



SR-8451

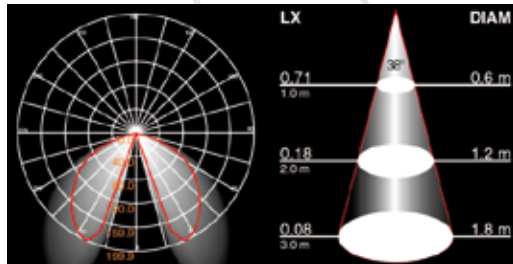

Product Code: SR-8453LED-200/1x7W

Watt: 1x1W
 Kelvin: 3000K
 Lumens: 400lm
 Beam Angle: 38°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-8451LED-220/1x7W

Watt: 1x7W
 Kelvin: 3000K
 Lumens: 400lm
 Beam Angle: 36°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ CREE LED
- ▶ Die cast aluminium body and clear glass

**SR-8453LED
 200/1x7W
 SR-8451
 220/1x7W**



BOLLARDS



SR-5733 LED-750



SR-5733 LED-220

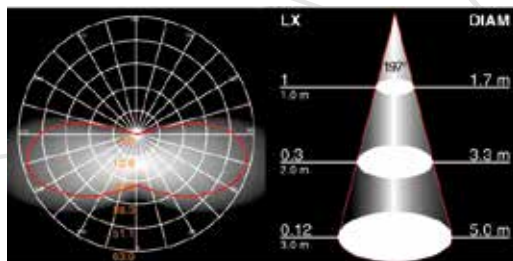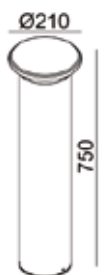

Product Code: SR-5733LED-750 10x1W

Watt: 10x1W
 Kelvin: 3000K
 Lumens: 253lm
 Beam Angle: 197°
 CRI: >81
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-5733LED-220 10x1W

Watt: 10x1W
 Kelvin: 3000K
 Lumens: 253lm
 Beam Angle: 197°
 CRI: >81
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H





- ▶ CREE LED ACRED - no driver
- ▶ Die cast aluminium body, frosted PC diffuser

**SR-5733LED
 750/10x1W
 SR-5733LED
 220/10x1W**

BOLLARDS



SR-1221

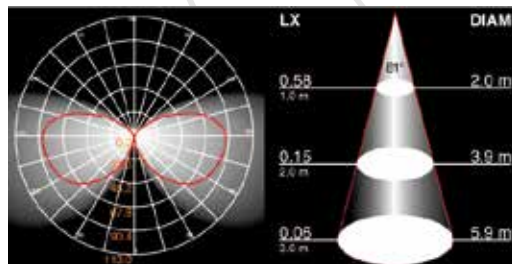

Product Code: SR-1221/18W

Watt: 18W

Kelvin: 3000K

Lumens: 737lm

Beam Angle: 81°

CRI: >84

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- ▶ SMD LED - AC LED - no driver
- ▶ Die cast aluminium body, opal PC diffuser

SR-1221/18W

BOLLARDS



SR-8404COB-650



SR-8404COB



SR-8404COB-265

Ø120




650

Ø120



265


Ø120



260

100

181

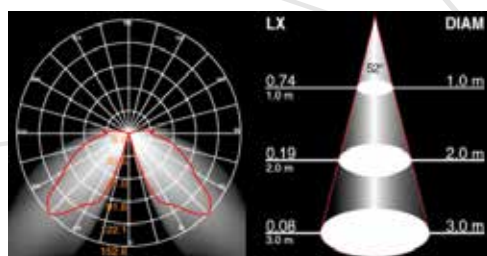

Product Code: SR-8404COB-650/1x15W

Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V~50
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-8404COB-265/1x15W

Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-1221/18W

Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H



- ▶ SMD LED
- ▶ Die cast aluminium body, clear PC diffuser

SR-8404COB-650
SR-8404COB-265
SR-8404COB

BOLLARDS






SR-8414COB650



SR-8414COB265



SR-8412COB

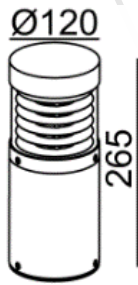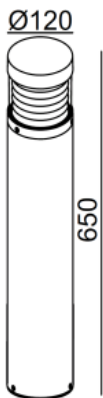

Product Code: SR-8414COB650/1x15W


Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V~50
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-8414COB-265/1x15W

Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

Product Code: SR-8412COB/1x15W

Watt: 1x15W
 Kelvin: 3000K
 Lumens: 568lm
 Beam Angle: 52°
 CRI: >82
 Input: AC 200-240V ~ 50Hz
 Ambient Temperature: 25°C~50°C
 Lamp Life: 30,000H

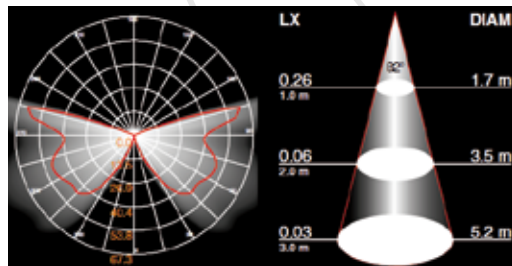

- ▶ CREE LED
- ▶ Die cast aluminium body and clear PC



SR-8414COB650
SR-8414COB265
SR-8412COB

SPIKE LIGHT





SR7501/7501G



SR7502/7502G



SR7503/7503G







on request

Product Code: SR-7501
 Watt: 7.8W LUMILEDS
 Kelvin: 3000K
 Luminous flux: 375lm
 Beam Angle: 15°/25°/38°/60°
 CRI: 92.5
 Input: AC 220-290V~50/60Hz
 Power factor: 0.94
 Lamp Life: 50,000H

Product Code: SR-7502
 Watt: 7.8W LUMILEDS
 Kelvin: 3000K
 Luminous flux: 375lm
 Beam Angle: 15°/25°/38°/60°
 CRI: 92.5
 Input: AC 220-290V~50/60Hz
 Power factor: 0.94
 Lamp Life: 50,000H

Product Code: SR-7503
 Watt: 7.8W LUMILEDS
 Kelvin: 3000K
 Luminous flux: 375lm
 Beam Angle: 15°/25°/38°/60°
 CRI: 92.5
 Input: AC 220-290V~50/60Hz
 Power factor: 0.94
 Lamp Life: 50,000H

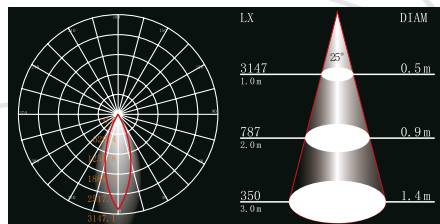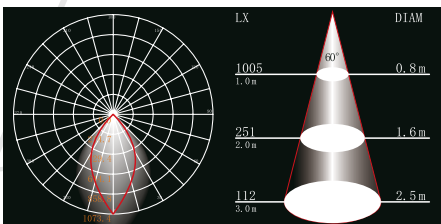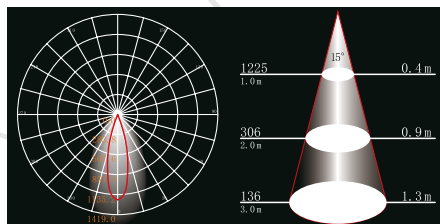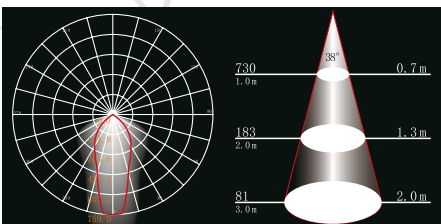

- ▶ Lumileds chip
- ▶ Lifud driver
- ▶ Die cast aluminium body, clear glass
- ▶ Honey comb on request

SR-7501
 SR-7502
 SR-7503
 SR-7501G-7502G-7503G
 GU10 MAX 35W



SYMBOLS



Foro incasso
Cut out
Trou d'encastrement



Apparecchi calpestabili
Walk over fitting
Appareils piétonniers



Apparecchi carrabili
Drive over fitting
Pour passage véhicules



Alimentatore incluso
Converter included
Convertisseur inclus



Alimentatore non incluso
Converter not included
Convertisseur pas inclus



Lunghezza cavo
Cable length
Longueur du câble



Dimmer incluso
Dimmer Included
Dimmer inclus



Dati fotometrici
Photometrical data
Donnés photométriques



Indica il grado di protezione degli involucri (vedi pag. 8)
It shows protection degree of the envelopes. (see page 8)



Grado di protezione contro gli impatti meccanici esterni (vedi pag. 8)
Degree of Protection against external mechanical impact (see page 8)



Grado di protezione Glow-wire
Apparecchio che resiste alla prova del filo incandescente
Degree of protection Glow-wire
Materials that resist the glow-wire test

MARKS



Apparecchio in Classe II, munito di isolamento doppio o rinforzato
Fixture on Class II, with double or reinforced insulation
Appareil en Classe II, équipé d'isolation double ou renforcée



Apparecchio a bassissima tensione con trasformatore remoto
SELV fixture with remote transformer
Appareil à très basse tension avec transformateur à distance



Apparecchio adatto ad essere installato su superfici normalmente infiammabili
Fixture ready for installation on normally inflammable surfaces
Appareil pouvant être installé sur des surfaces inflammables



Grado di protezione contro gli impatti meccanici esterni
Degree of Protection against external mechanical impact.

Gradi di protezione Ik
Ik degree protection

IK00 Non protetto Not protected
IK01 Protetto contro l'energia d'urto 0,15J Protected against impact strength 0,15J
IK02 Protetto contro l'energia d'urto 0,20J Protected against impact strength 0,20J
IK03 Protetto contro l'energia d'urto 0,35J Protected against impact strength 0,35J
IK05 Protetto contro l'energia d'urto 0,7J Protected against impact strength 0,7J
IK06 Protetto contro l'energia d'urto 1J Protected against impact strength 1J
IK07 Protetto contro l'energia d'urto 2J Protected against impact strength 2J
IK08 Protetto contro l'energia d'urto 5J Protected against impact strength 5J
IK09 Protetto contro l'energia d'urto 10J Protected against impact strength 10J
IK10 Protetto contro l'energia d'urto 20J Protected against impact strength 20J



1ª cifra definisce la protezione contro il contatto dei corpi solidi
1st. number indicates protection against solids body penetration

2ª cifra definisce la protezione contro la penetrazione dei liquidi
2nd. number indicates protection against liquid penetration

Lettera aggiuntiva indica il grado di protezione per le persone contro l'accesso a parti pericolose
Additional letter specifies the degree of protection against human access to live parts.

Prima cifra First number	Seconda cifra Second number	Lettera aggiuntiva Additional letter
0 non protetto not protected	0 non protetto not protected	A Protetto contro l'accesso con il dorso della mano Protected against access with the back of the hand
1 protetto contro corpi solidi di ø maggiore 50 mm protected against solids over ø 50 mm	1 protetto contro la caduta verticale di gocce d'acqua protected against the vertical fall of water drops	B Protetto contro l'accesso con un dito Protected against access with a finger
2 protetto contro corpi solidi di ø maggiore 12 mm protected against solids over ø 12 mm	2 protetto contro la caduta verticale di gocce d'acqua 15° protected against the vertical fall of water drops 15°	C Protetto contro l'accesso con un attrezzo Protected against access with a tool
3 protetto contro corpi solidi di ø maggiore 2,5 mm protected against solids over ø 2,5 mm	3 protetto contro la pioggia protected against rain drops	D Protetto contro l'accesso con un filo Protected against access with a wire
4 protetto contro corpi solidi di ø maggiore 1 mm protected against solids over ø 1 mm	4 protetto contro gli spruzzi d'acqua protected against splashing water	
5 protetto contro la polvere protected against dust	5 protetto contro i getti d'acqua protected against jets of water	
6 totalmente protetto contro la polvere entirely protected against dust	6 protetto contro le ondate protected against sea waves	
	7 protetto contro le immersioni fino a 1 m protected against immersion 1 m depth	



Tutti i prodotti SIRIO Luce che rientrano nell'ambito di applicazione della direttiva europea compatibilità elettromagnetica E.M.C. 2014/30/UE e successive modifiche, soddisfano i requisiti e recano la marcatura "CE".
All SIRIO Luce product fall within the range of application of the European electromagnetic compatibility E.M.C. directive 2014/30/UE and subsequent, meet the required specifications and bear "CE" labelling.
Tous les produits SIRIO Luce appartenant au champ d'application de la directive européenne compatibilité électromagnétique E.M.C. 2014/30/UE et modification successive remplissent les conditions prévues et portent le marquage "CE"

SIRIO Luce reserves the rights to change components brands without notice as SIRIO Luce employs system of permanent product improvements, it reserves the right to modify any of the products without any prior notification.

INDEX

SPOT LIGHT

CODE	PAGE
SR-7468	06
SR-2008	07
SR-2006	08
SR-213-218	09
SR-203-208	10
SR-74026	11
SR-7495/7W	12

SURFACE DOWN LIGHT

CODE	PAGE
SR-1081-ES	13
SR-1082-ES	14

RECESSED DOWNLIGHT

CODE	PAGE
SR-1073-ES	15

PANEL LED

CODE	PAGE
SR-PN008	16

RECESSED DOWNLIGHT

CODE	PAGE
SR-6331-SL	17
SR-1074ES	18

CUSTOMIZED INTERIOR SOLUTIONS

PAGE
19

OUTDOOR LIGHTING SURFACE WALL LIGHT

CODE	PAGE
SR-6156	26
SR-6155	27
SR-3210	28
SR-2553 LED	29
SR-2542	30
SR-2841 COB	31
SR-2851 COB	31
SR-2300	32
SR-2310A	32
SR-2200	33
SR-9320	34
SR-9310	34
SR-9300	34
SR-1121A	35
SR-1122A	35
SR-2772LED	36
SR-2771LED	36

SURFACE CEILING LIGHT

CODE	PAGE
SR-5764-LED	37
SR-5774-LED	37
SR-5683-LED	38
SR-5693-LED	38

FLOOD LIGHT

CODE	PAGE
SR-TGD-28006	39
SR-TGD-28007	39
SR-TGD-28008	39
SR-TGD-28008B	39
SR-TGD-28118	40
SR-TGD-28118B	40
SR-TGD-28718	40
SR-TGD-R715	40
SR-1260UB-50	41
SR-1260UB-30	41
SR-1260UB-30F	41

RECESSED LINEARLIGHT

CODE	PAGE
SR-2306	42
SR-2306	43

RECESSED UP LIGHT

CODE	PAGE
SR-2130C	44
SR-2130S	44
SR-2106A-6/7W	45
SR-2106B-6/12W	45
SR-2110C-6/14W	46
SR-2110C-7/16W	46

RECESSED INGROUD UP LIGHT

CODE	PAGE
SR-2103C-C6/6W	47
SR-2106C-C8/8W	47

RECESSED UP LIGHT

CODE	PAGE
SR-3200A	48
SR-3200B	48

PATHWALK LIGHT


CODE	PAGE
SR-4400C/3W	49
SR-4500C/2+1W	49

BOLLARDS

CODE	PAGE
SR-8453LED200	50
SR-8451	50
SR-5733LED	
750/10x1W	51
SR-5733LED	
220/10x1W	51
SR-1221/18W	52
SR-8404COB-650	53
SR-8404COB-265	53
SR-8404COB-650	53
SR-8414COB650	54
SR-8414COB265	54
SR-8414COB	54

SPIKE LIGHT

CODE	PAGE
SR-7501	55
SR-7502	55
SR-7503	55
7501G-7502G-7503G	



SIRIO Luce
Italian Style

SIRIOLUCE - ITALY
Via Ghisolfa, 80/e
20010 Cornaredo (MI)

info@sirioluce.com
www.sirioluce.com

SIRIO Luce
Italian Style

