

SIRIO Luce
Italian Style



INTRODUCTION

SIRIO Luce is taking the mission to catch the star light and to shift it into our night times.

Any lighting system has a task overall relevant, to reproduce as much as possible natural effects, to generate an environment supporting our well being.

The human as central point of the system, the natural appearance of his surrounding as target.

SIRIO Luce is taking into proper attention energetic aspects as well as biological compatibility to light in term of glare control, colour rendering, right balance of shades and bright area.

A mission which is based on an accurate selection of products offered in a wide range, extended from indoor to outdoor areas and all of them, equipped with best light sources and controlled by high quality electrical components. In a very busy market, a real star: SIRIO Luce.

SIRIO Luce implementa la missione di catturare la luce delle stelle e riprodurla nelle ore notturne.

Ogni sistema di illuminazione ha un compito rilevante, riprodurre il più possibile gli effetti naturali per generare un ambiente, che corrobora il nostro benessere.

L'uomo come punto centrale del sistema, l'aspetto più naturale possibile del suo ambiente, l'obbiettivo.

SIRIO Luce prende in esame gli aspetti energetici e la compatibilità biologica con la luce, valuta attentamente gli indici di abbigliamento, seleziona le rese cromatiche e bilancia i contrasti tra luce ed ombre.

Una missione che si basa su un'accurata selezione dei prodotti, offerti in un'ampia gamma da interni ed esterni, equipaggiati dalle migliori sorgenti luminose e controllati da componenti elettrici di alta qualità.

In un mercato molto saturo, una vera stella: SIRIO Luce.

DESIGN

Designing a complete and suitable luminous environment is more complicated than simply selecting lighting fixtures.

With the help of experience and expertise sirio is committed to developed spatial patterns of light, shade, and color that requires thinking about light in three dimensions.

Such recognition implies understanding and sensitivity to techniques that create an environment where observers react with feelings of pleasantness and well-being through the use of silhouette, color tone, and other patterns of spatial light.

Progettare un ambiente,rendendo-lo confortevole e suggestivo,e' un compito molto piu' qualificato che la semplice selezione di prodotti di illuminazione.




Sirio Luce,con l'esperienza dei suoi progettisti,realizza ambienti con il giusto equilibrio di luci ed ombre,determinando una corretta definizione degli spazi.

Tale capacita' si basa su una corretta interpretazione emozionale e tecnica,valuando, con specifica sensibilita',la necessita'di realizzare ambienti confortevoli e funzionali,nei quali il benessere visivo trova una necessaria rilevanza



INTERIOR TECHNICAL

SPOT LIGHT



Product Code: SR-7468-2.5/7W

Watt: 7W
Kelvin: 3000K/4000K/6400K
Lumens: 630lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-7468-3/12W

Watt: 12W
Kelvin: 3000K/4000K/6400K
Lumens: 1080lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H


Product Code: SR-7468-4/18W

Watt: 18W
Kelvin: 3000K/4000K/6400K
Lumens: 1620lm
Beam Angle: 28°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



- PHILIPS driver and CREE led
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

SPOT LIGHT



SR-2008/10W

Product Code: SR-2008/10W

Watt: 10W

Kelvin: 3000K/4000K/6400K

Lumens: 900lm

Beam Angle: 15°/25°/38°/60°

CRI: >80

Input: AC 200-240V~50/60Hz

Ambient Temperature: 25°C~50°C


Lamp Life: 30,000H



- LIFUD driver. Other brands available on request
- LUMILEDS COB
- Other frame finishing color available on request based on RAL

SR-2008

SPOT LIGHT



SR-2006/10W

Product Code: SR-2006/10W

Watt: 10W

Kelvin: 3000K/4000K/6400K

Lumens: 900lm

Beam Angle: 15°/25°/38°/60°

CRI: >80

Input: AC 200-240V~50/60Hz


Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

IP 54

- LIFUD driver. Other brands available on request
- LUMILEDS COB
- Other frame finishing color available on request based on RAL

SPOT LIGHT

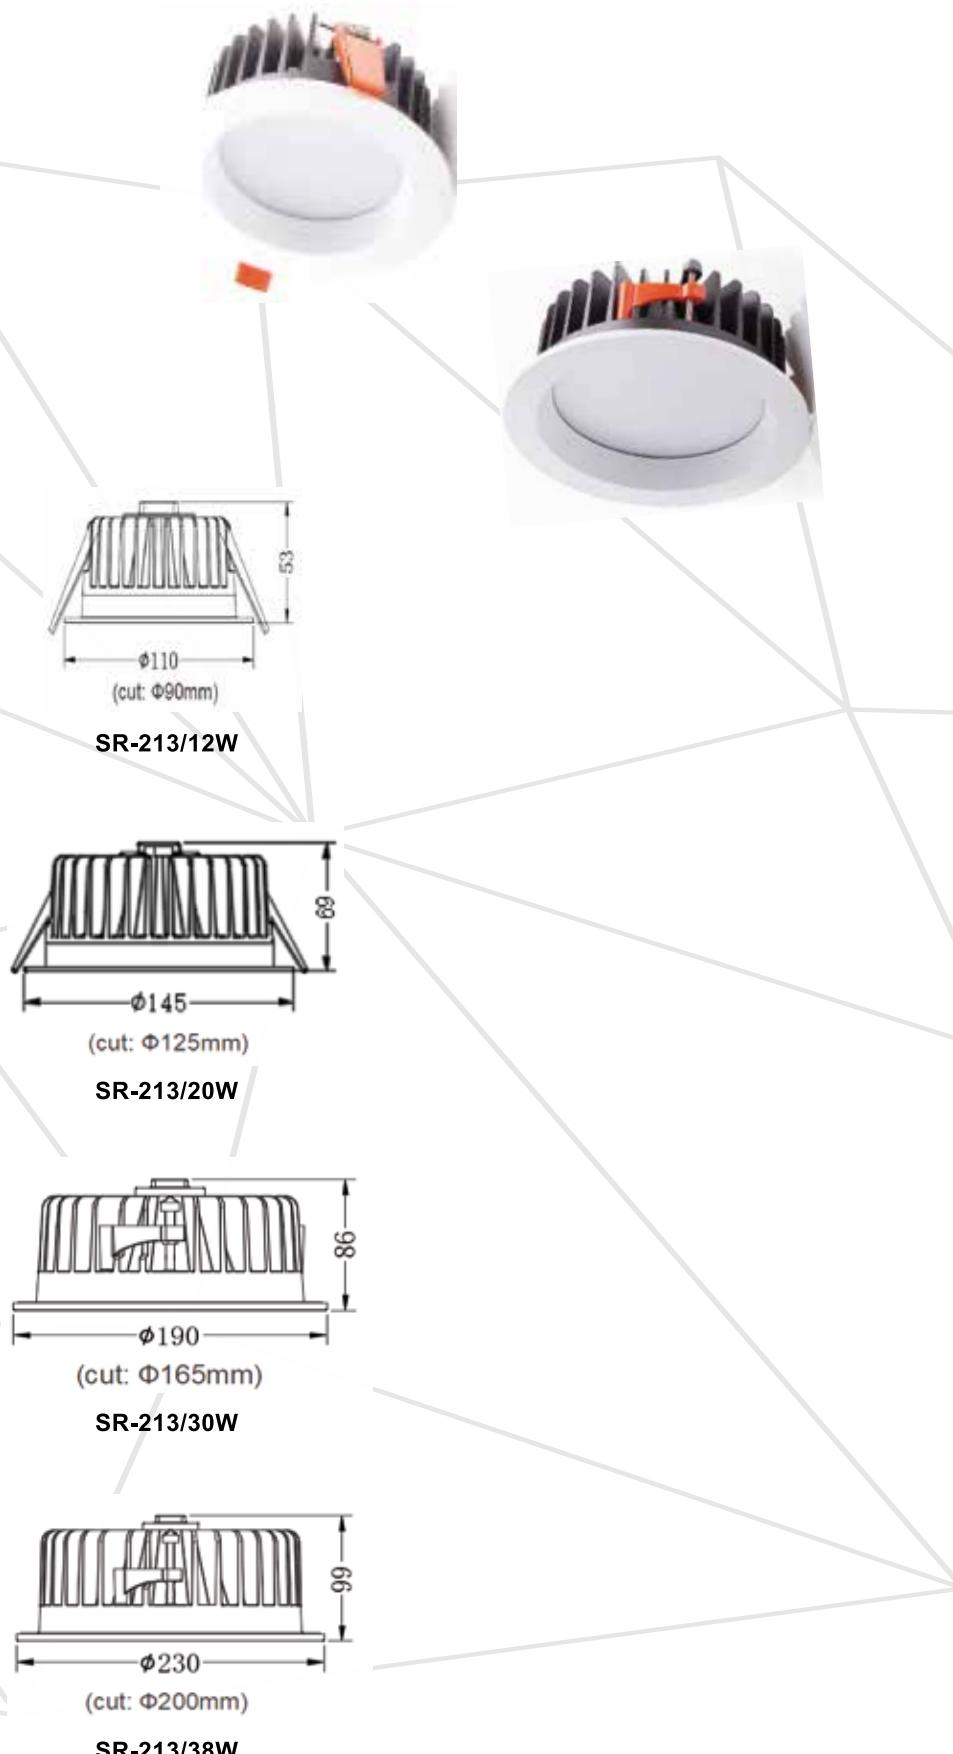

Product Code: SR-213/12W

Watt: 12W
Kelvin: 3000K/4000K/6400K
Lumens: 1050lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-213/20W

Watt: 20W
Kelvin: 3000K/4000K/6400K
Lumens: 1800lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-213/30W

Watt: 30W
Kelvin: 3000K/4000K/6400K
Lumens: 2700lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-213/38W


Watt: 38W
Kelvin: 3000K/4000K/6400K
Lumens: 3400lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H




- OSRAM driver and CREE led chip
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

SR-213-218


SPOT LIGHT




SR-203/10W



SR-203/18W

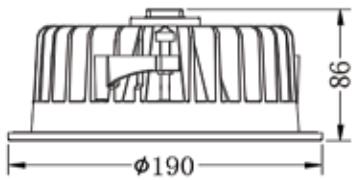

SR-203/24W

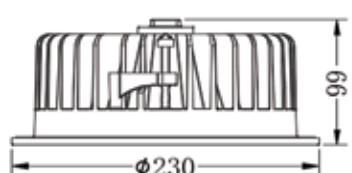

SR-203/30W

Product Code: SR-203/10W

Watt: 10W
Kelvin: 3000K/4000K/6400K
Lumens: 1050lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-203/18W

Watt: 18W
Kelvin: 3000K/4000K/6400K
Lumens: 1800lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-203/24W

Watt: 24W
Kelvin: 3000K/4000K/6400K
Lumens: 2700lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



Product Code: SR-203/30W

Watt: 30W
Kelvin: 3000K/4000K/6400K
Lumens: 3400lm
Beam Angle: 90°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



- LIFUD driver and CREE led chip
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

SPOT LIGHT



Product Code: SR-74026/28W

Watt: 28W
Kelvin: 3000K/4000K/6400K
Lumens: 2500lm
Beam Angle: 20°/40°/60°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-74026/42W


Watt: 42W
Kelvin: 3000K/4000K/6400K
Lumens: 3750lm
Beam Angle: 20°/40°/60°
CRI: >80
Input: AC 200-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H




- PHILIPS driver and CREE led chip
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

SR-74026

SPOT LIGHT



SR-7495/7W

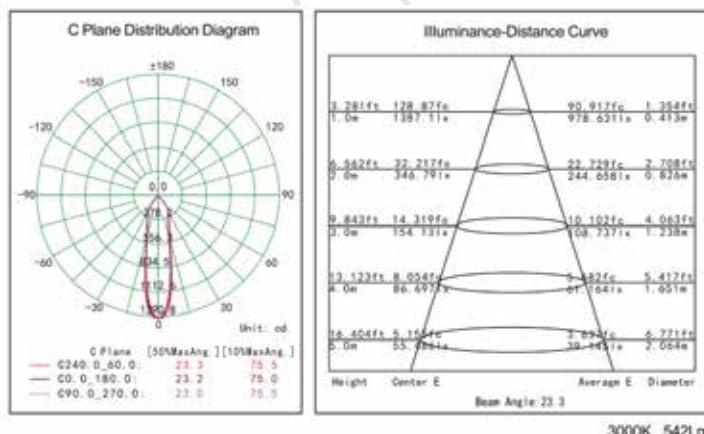

Product Code: SR-7495/7W

Watt: 7W

Kelvin: 3000K/4000K/6400K

Lumens: 542lm

Beam Angle: 24°

CRI: >80

Input: AC 200-240V~50/60Hz


Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

SURFACE DOWN LIGHT

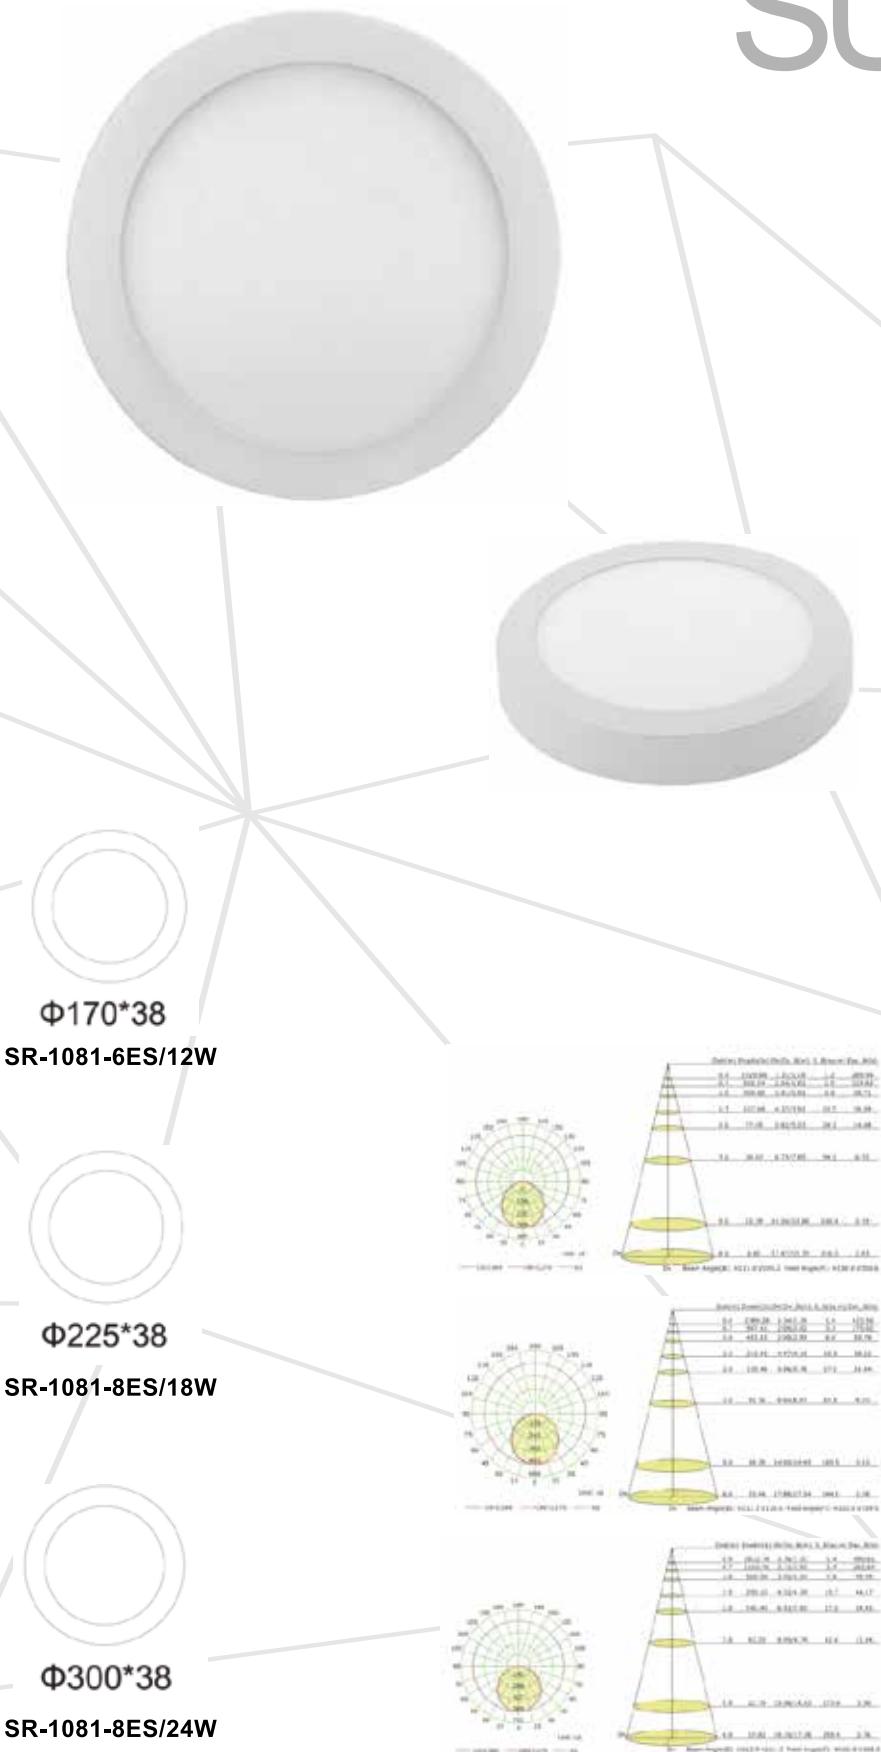

Product Code: SR-1081-6ES/12W

Watt: 12W

Kelvin: 3000K/4000K/6400K

Lumens: 760lm/770lm/780lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1081-8ES/18W

Watt: 18W

Kelvin: 3000K/4000K/6400K

Lumens: 1150lm/1250lm/1350lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1081-8ES/24W

Watt: 24W

Kelvin: 3000K/4000K/6400K

Lumens: 1600lm/1700lm/1800lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H




- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL


SURFACE DOWN LIGHT






170*170*38
SR-1082-6ES/12W



225*225*38
SR-1082-8ES/18W



300*300*38
SR-1082-8ES/24W

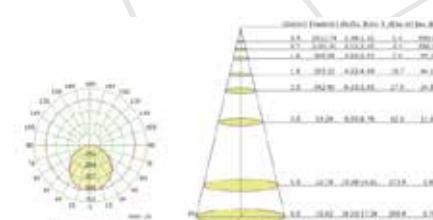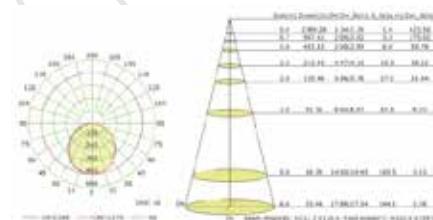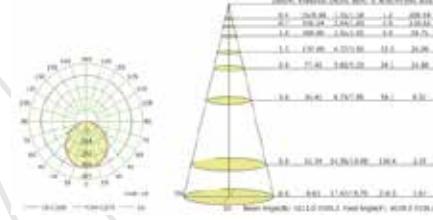

Product Code: SR-1082-6ES/12W

Watt: 12W

Kelvin: 3000K/4000K/6400K

Lumens: 760lm/770lm/780lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1082-8ES/18W

Watt: 18W

Kelvin: 3000K/4000K/6400K

Lumens: 1150lm/1250lm/1350lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1082-8ES/24W

Watt: 24W

Kelvin: 3000K/4000K/6400K

Lumens: 1600lm/1700lm/1800lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL




RECESSED DOWNLIGHT



$\Phi 170^*20$
 $\Phi 160$
SR-1073-6ES/12W

$\Phi 225^*20$
 $\Phi 206$
SR-1073-8ES/18W

$\Phi 300^*20$
 $\Phi 280$
SR-1073-10ES/24W

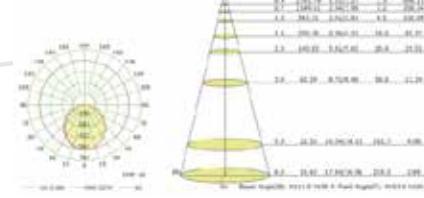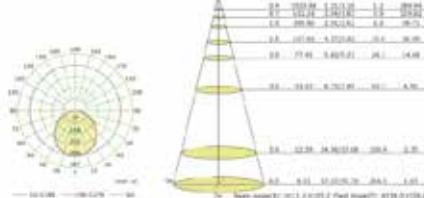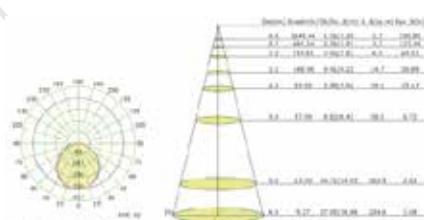

Product Code: SR-1073-6ES/12W

Watt: 12W

Kelvin: 3000K/4000K/6400K

Lumens: 760lm/770lm/780lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1073-8ES/18W

Watt: 18W

Kelvin: 3000K/4000K/6400K

Lumens: 1100lm/1150lm/1200lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1073-10ES/24W

Watt: 24W

Kelvin: 3000K/4000K/6400K

Lumens: 1600lm/1650lm/1700lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

PANEL LED



MOUNTING OPTIONS




1)Insert construction




2)Hanging construction



3)Surface mount construction

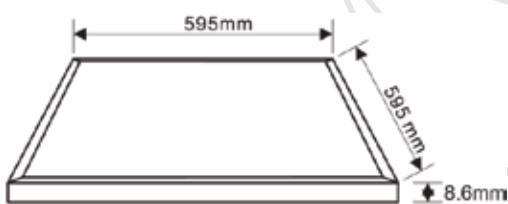

SR-1081-8ES/24W

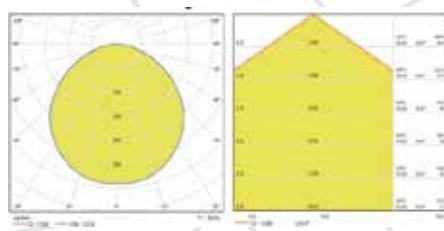

Product Code: SR-PN008-6ES/48W

Watt: 48W

Kelvin: 3000K/4000K/6400K

Lumens: 4200lm/4300lm/4400lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz





Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- Dimmable and emergency on request
- RAL 9016 other RAL color on request
- IP44 and IP65 on request

RECESSED DOWNLIGHT

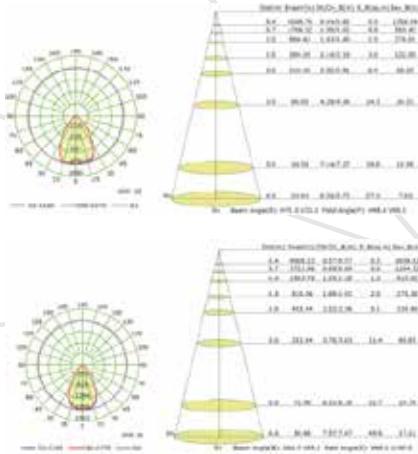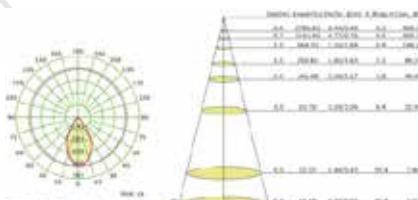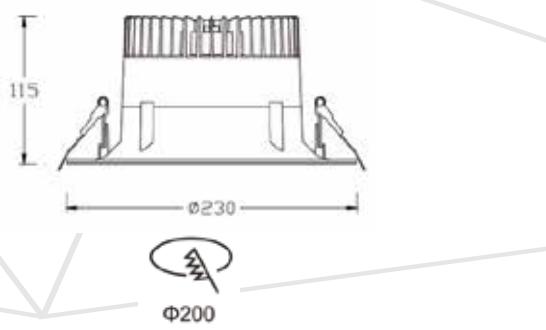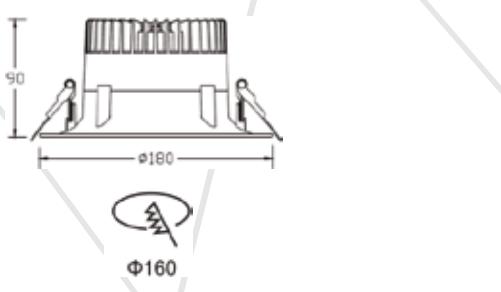

Product Code: SR-6331-2SL/8W

Watt: 8W

Kelvin: 3000K/4000K/6400K

Lumens: 560lm/600lm/650lm

Beam Angle: 60°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-6331-6SL/15W

Watt: 15W

Kelvin: 3000K/4000K/6400K

Lumens: 1230lm/1300lm/1400lm

Beam Angle: 60°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-6331-8SL/25W

Watt: 25W

Kelvin: 3000K/4000K/6400K

Lumens: 2200lm/2330lm/2500lm

Beam Angle: 60°

CRI: >80

Input: AC 100-240V~50/60Hz


Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL

RECESSED DOWNLIGHT



170*170*20



155*155

SR-1081-6ES/12W



225*225*20



205*205

SR-1081-8ES/18W









300*300*20



280*280

SR-1081-8ES/24W

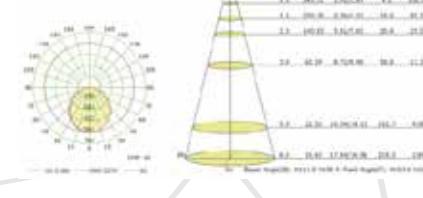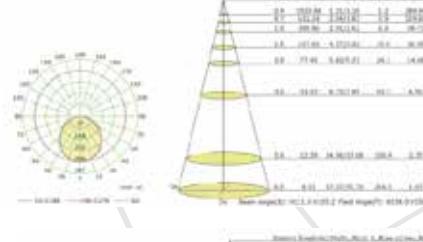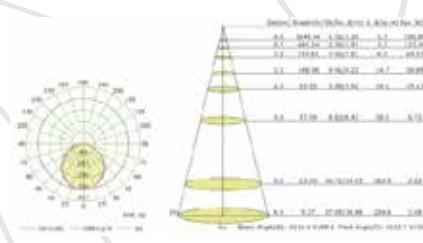

Product Code: SR-1081-6ES/12W

Watt: 12W

Kelvin: 3000K/4000K/6400K

Lumens: 760lm/770lm/780lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1081-8ES/18W

Watt: 18W

Kelvin: 3000K/4000K/6400K

Lumens: 1100lm/1150lm/1200lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1081-8ES/24W

Watt: 24W

Kelvin: 3000K/4000K/6400K

Lumens: 1600lm/1650lm/1700lm

Beam Angle: 120°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



SR-1074ES

- Any brands of driver available on request
- Dimmable Driver On Request
- Other frame finishing color available on request based on RAL



CUSTOMIZED INTERIOR SOLUTIONS

SIRIO Luce provides one of its best performances in the decorative fixtures field, either architectural or classic: from sketch to the CAD drawing and shop drawings, SIRIO Luce can supply any product totally customized in size, shape, finishing.

The Interior Designer creativity stays free.


SIRIO Luce will materialize the idea.

Nel campo del decorativo architettonico e classico, SIRIO Luce garantisce una delle sue migliori capacità: dallo schizzo al disegno CAD ai disegni costruttivi completi, SIRIO Luce può fornire ogni prodotto richiesto in dimensione, stile, finitura, totalmente customizzati. La creatività dell'Interior Designer rimane libera. SIRIO Luce da sostanza alla sua idea.








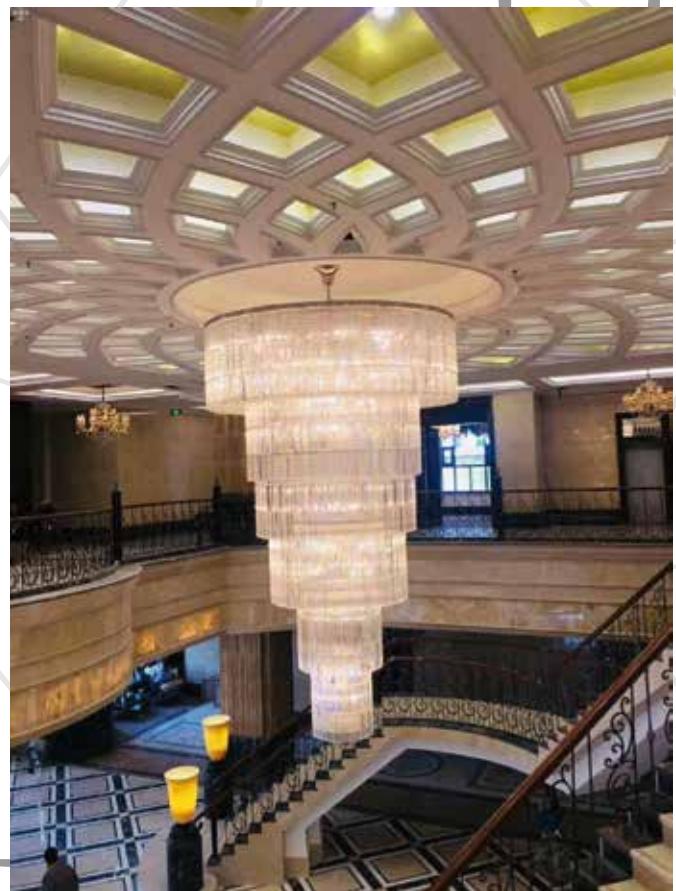



OUTDOOR LIGHTING

SURFACE WALL LIGHT

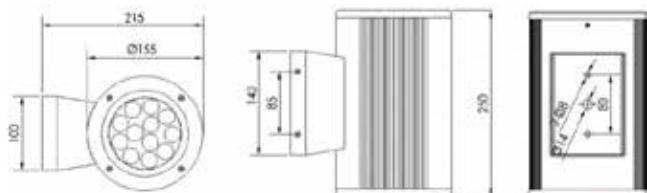

Product Code: SR-6156A-9/11W

Watt: 11W

Kelvin: 3000K/4000K/6400K

Beam Angle: DOWN 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 50,000H

Product Code: SR-6156B-9/16W

Watt: 16W

Kelvin: 3000K/4000K/6400K

Beam Angle: DOWN 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 50,000H

Product Code: SR-6156-20/26W

Watt: 26W COB

Kelvin: 3000K/4000K/6400K


Beam Angle: DOWN 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V~50/60Hz





Ambient Temperature: 25°C~50°C

Lamp Life: 50,000H

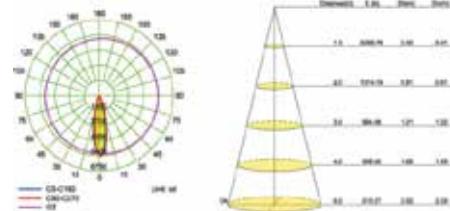

- CREE LED
- Die cast aluminium body
- Driver built in

SURFACE WALL LIGHT



Product Code: SR-6155A-18//21W

Watt: 21W

Kelvin: 3000K/4000K/6400K

Beam Angle: UP & DOWN

5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 50,000H

Product Code: SR-6155B-18/36W

Watt: 36W

Kelvin: 3000K/4000K/6400K

Beam Angle: UP & DOWN

5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 50,000H






IP66

- CREE LED
- Driver built in

SR-6155

SURFACE WALL LIGHT



- LED SMD
- Driver included
- Die cast aluminium body

Product Code: SR-3210B-2/4W

Watt: 4W

Kelvin: 3000K/4000K/5000K

Beam Angle: 2°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H

Product Code: SR-3210B-4/8W

Watt: 8W

Kelvin: 3000K/4000K/5000K

Beam Angle: 2°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C



Lamp Life: 50,000H



IP66

SR-3210

SURFACE WALL LIGHT

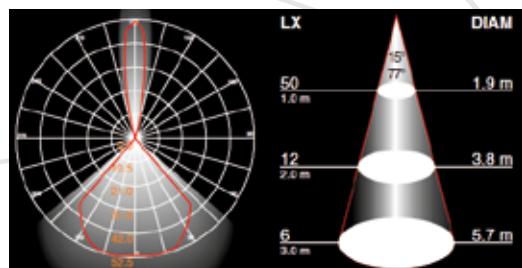

Product Code: SR-2553/2x4.5W

Watt: 2x4.5W

Kelvin: 3000K

Beam Angle: 15°/78°

CRI: >80

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H





IP54

- CREE LED
- Driver hep (build in)
- Die cast aluminium body

SR-2553 LED

SURFACE WALL LIGHT

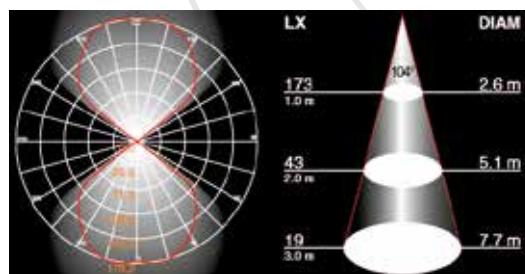

Product Code: SR-2542 /2x5W

Watt: 2x5W

Kelvin: 3000K

Beam Angle: 104°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



IP54

► LED CREE1304
► Driver hep

SR-2542




SURFACE WALL LIGHT



SR-2841 COB



SR-2851 COB

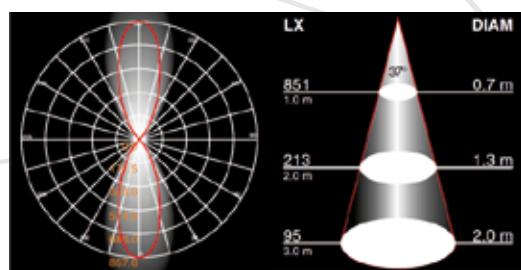

Product Code: SR-2851 COB/2x7W

Watt: 2x7W

Kelvin: 3000K

Lumens: 890lm

Beam Angle: 37°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2841 COB/2x7W

Watt: 2x7W

Kelvin: 3000K

Lumens: 890lm

Beam Angle: 37°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



IP54

- CREE COB 1304
- Driver hep
- Die cast aluminium body

**SR-2841 COB
SR-2851 COB**


SURFACE WALL LIGHT



SR-2841 COB



SR-2851 COB



Product Code: SR-2300/20W

Watt: 20W E27 (E27)

Kelvin: 3000K

Lumens: 1140lm


Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 20,000H



Product Code: SR-2300/20W

Watt: 20W (E27)

Kelvin: 3000K

Lumens: 1140lm

Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 20,000H



- Die cast aluminium body
- E27 lamp holder led version available on request
- Polycarbonate diffuser



SURFACE WALL LIGHT



SR-2200



SR-2310B



Product Code: SR-2200/20W

Watt: 20W E27 (E27)

Kelvin: 3000K

Lumens: 1140lm

Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 20,000H

Product Code: SR-2310B/20W

Watt: 20W (E27)

Kelvin: 3000K

Lumens: 1140lm

Beam Angle: Wide

CRI: >80

Input: AC 100-240V~50/60Hz

Ambient Temperature: 25°C~50°C


Lamp Life: 20,000H



- Die cast aluminium body
- E27 lamp holder led version available on request
- Polycarbonate diffuser




**SR-2200
SR-2310B**

RECESSED WALL LIGHT

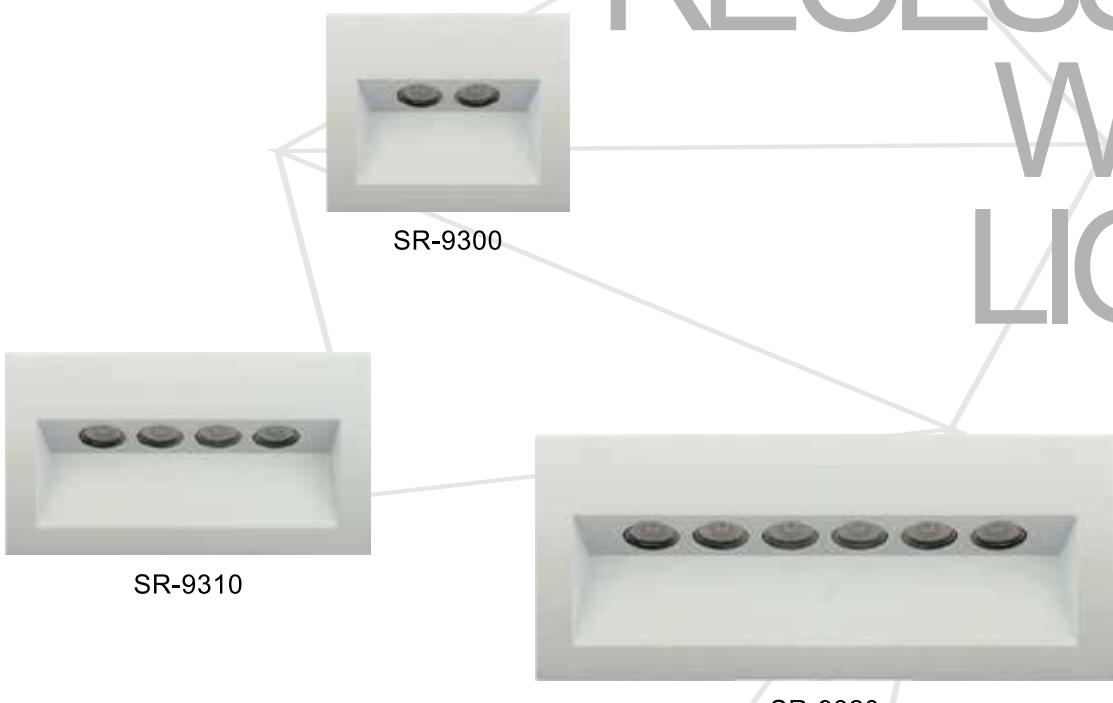

SR-9310

SR-9320

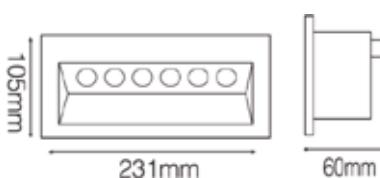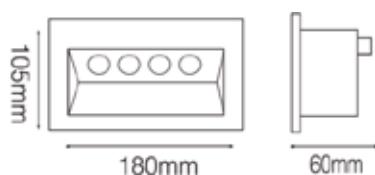

Product Code: SR-9300/2x1W

Watt: 2x1W
Kelvin: 3000K
Lumens: 220lm
Beam Angle: Wide
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H

Product Code: SR-9310/4x1W

Watt: 4x1W
Kelvin: 3000K
Lumens: 440lm
Beam Angle: Wide
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H


Product Code: SR-9320/6x1W

Watt: 6x1W
Kelvin: 3000K
Lumens: 660lm
Beam Angle: Wide
CRI: >80
Input: AC 100-240V~50/60Hz
Ambient Temperature: 25°C~50°C
Lamp Life: 30,000H



- ▶ LED SMD CRI 85
- ▶ Driver CE certified
- ▶ Body die cast aluminium, plastic recessed box





RECESSED WALL LIGHT

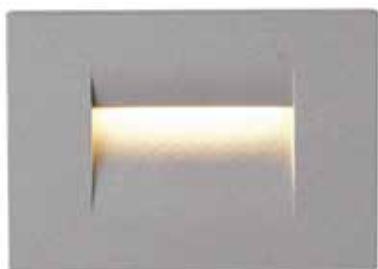

SR-1121A



SR-1122A

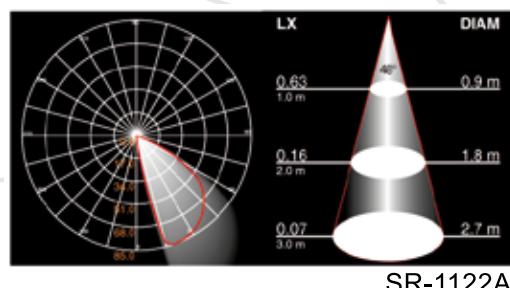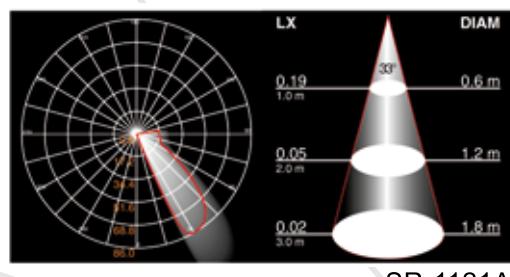

Product Code: SR-1121A/3.6W

Watt: 3.6W

Kelvin: 3000K

Lumens: 75lm

Beam Angle: 33°

CRI: >80

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1122A XXXXXX

Watt: 3.6W

Kelvin: 3000K

Lumens: 99lm

Beam Angle: 48°

CRI: >80

Input: AC 200-240V ~ 50Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



- LED PHILIPS 3014
- Driver built in (er brand)
- Die cast aluminium body and recessed plastic box
- PC diffuser

**SR-1121A
SR-1122A**



RECESSED WALL LIGHT



SR-2772LED



SR-2771LED

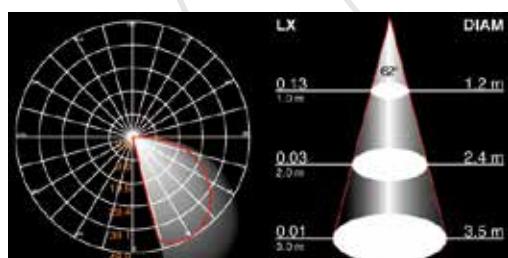

Product Code: SR-2772LED/1x3W

Watt: 1x3W

Kelvin: 3000K

Lumens: 54lm

Beam Angle: 62°

CRI: >79

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2841 COB/2x7W

Watt: 1x3W

Kelvin: 3000K

Lumens: 54lm

Beam Angle: 62°

CRI: >79

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



- LED CREE XBD
- Driver er built in
- Die-cast aluminium body, 30N stedt cover
- Clear glass

**SR-2772LED
SR-2771LED**




SURFACE CEILING LIGHT



SR-5764-LED



SR-5774-LED

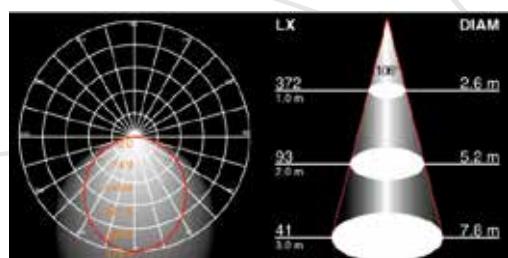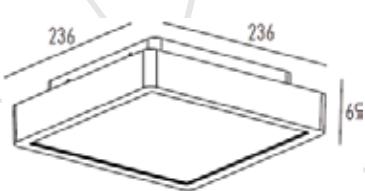

Product Code: SR-5764-LED/18W

Watt: 18W

Kelvin: 3000K

Lumens: 927lm

Beam Angle: 106°

CRI: >85

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-5774-LED/18W

Watt: 18W

Kelvin: 3000K

Lumens: 808lm

Beam Angle: 106°

CRI: >84

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



IP54

- LED PHILIPS 3014
- Driver self
- Die cast aluminium body RAL
- Opal PC diffuser

SR-5764-LED
SR-5774-LED




SURFACE CEILING LIGHT



SR-5683-LED



SR-5693-LED

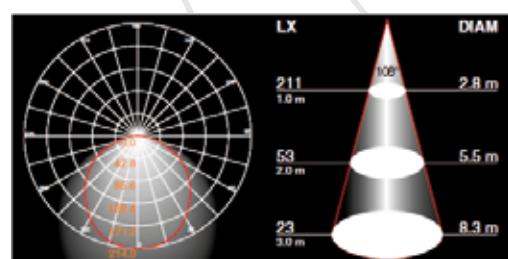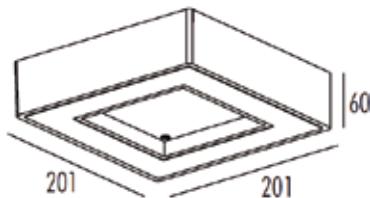

Product Code: SR-5683-LED/18W

Watt: 18W

Kelvin: 3000K

Lumens: 591lm

Beam Angle: 108°

CRI: >85

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-5693-LED/18W

Watt: 18W

Kelvin: 3000K

Lumens: 600lm

Beam Angle: 109°

CRI: >84

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



IP54

- LED PHILIPS 3014
- No Driver
- Die-cast aluminium body
- PC diffuser

**SR-5683-LED
SR-5693-LED**



FLOOD LIGHT



SR-TGD-28006





SR-TGD-28007

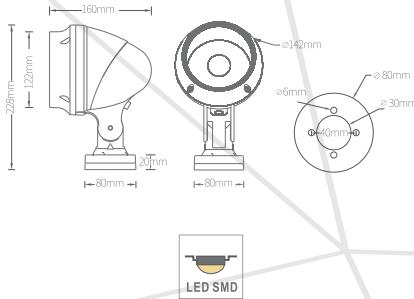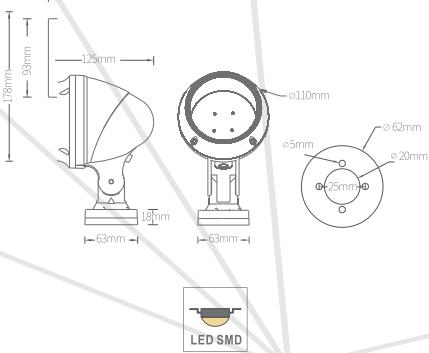

SR-TGD-28008



SR-TGD-28008B

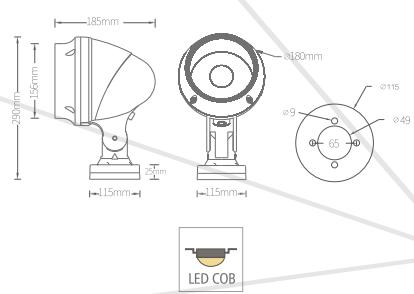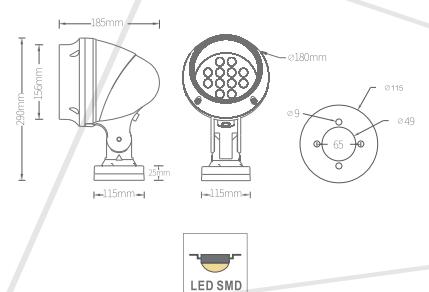

Product Code: SR-TGD-28006

Watt: 4x2W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS

Product Code: SR-TGD-28007

Watt: 12x2W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS

Product Code: SR-TGD-28008

Watt: 18x2W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS

Product Code: SR-TGD-28008B

Watt: 1x30W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: OSRAM/CREE




- LED CREE OR OSRAM
- Die cast aluminium body, RAL 7046


FLOOD LIGHT




SR-TGD-28118

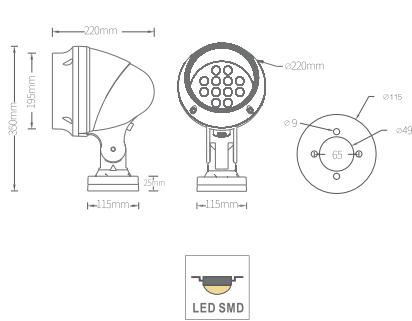


SR-TGD-28118B

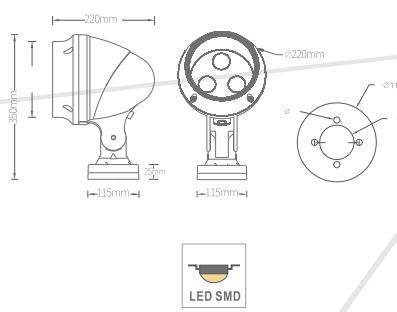

SR-TGD-28718

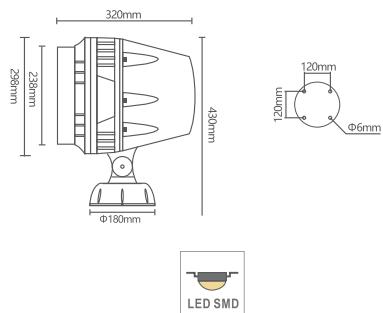

SR-TGD-R715

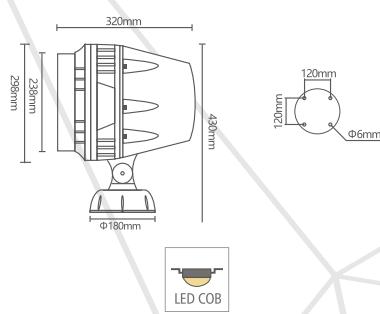

Product Code: SR-TGD-28118

Watt: 36x2W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS

Product Code: SR-TGD-28118B

Watt: 3x22W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/24°/38°/45°/60°

Input: 220-240VAC~50/60Hz

Product Code: SR-TGD-28718

Watt: 36x2W

Kelvin: 3000K/4000K/5500K/RGB/RGBW

Beam Angle: with lens 15°/25°/35°/45°/60°

Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS

Product Code: SR-TGD-R715

Watt: 80-100W


Kelvin: 4000K/5500K/RGB/RGBW

Beam Angle: with lens 17°/24°/38°/60°



Input: 220-240VAC~50/60Hz

LED: 1-3W/PCS



Installation:





RECESSED LINEAR LIGHT

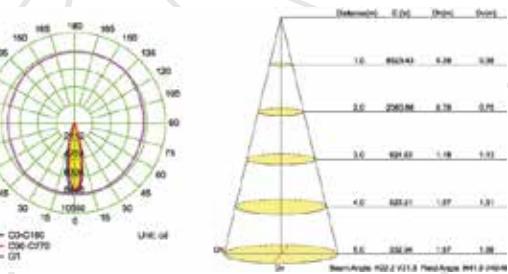

Cut Size: L292*W70*H100mm



Cut Size: L492*W70*H100mm



Cut Size: L992*W70*H100mm

Product Code: SR-2306A-18/21W (1M)

Watt: 21W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12.5°/20°/30°/45°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2306A-24/28W (1M)

Watt: 28W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12.5°/20°/30°/45°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2306A-36/42W (1M)

Watt: 42W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12.5°/20°/30°/45°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H





IP67



- ▶ CREE LED
- ▶ 6063 aluminium alloy body, stainless steel recessed houting
- ▶ Constant current driver

RECESSED LINEAR LIGHT



Product Code: SR-2306A-6/7W (0.3M)

Watt: 7W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12.5°/20°/30°/45°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2306A-9/11W (0.5M)

Watt: 11W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12.5°/20°/30°/45°/60°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-2306-48/11W (1M)

Watt: 21W (EPISTAR)

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 120°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



IP67



- ▶ CREE LED
- ▶ 6063 aluminium alloy body, stainless steel recessed houting
- ▶ Constant current driver


RECESSED UPLIGHT




SR-2130C







SR-2130S



SR-2130CA-24



SR-2130B-18



Product Code: SR-2130_A-18/21W

Watt: 21W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25~50°C

Lamp Life: 50,000H

Product Code: SR-2130_B-18/30W

Watt: 30W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25~50°C

Lamp Life: 50,000H

Product Code: SR-2130_B-24/40W

Watt: 40W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25~50°C

Lamp Life: 50,000H



IP67



- CREE LED
- Die cast aluminium body, ast 304 frarie aisi 316 frame on request)






RECESSED UPLIGHT



SR-2106C



SR-2106S



Product Code: SR-2106_A-6/7W

Watt: 7W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H

Product Code: SR-2106_B-6/12W

Watt: 12W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H



IP67



- CREE LED
- Die cast aluminium body, ast 304 frarie
aisi 316 frame on request)

SR-2106A-6/7W
SR-2106B-6/12W







RECESSED UPLIGHT



SR-2110C



SR-2110S



Product Code: SR-2110_C-6/14W

Watt: 14W

Kelvin: RGB/3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H

Product Code: SR-2110_C-7/16W

Watt: 16W

Kelvin: 3000K/4000K/5000K

Beam Angle: 5°/12,5°/20°/30°/45°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H



IP67



Cutting Size: 185mm


- ▶ CREE LED
- ▶ Die cast aluminium body, ast 304 frarie aisi 316 frame on request)

SR-2110C-6/14W
SR-2110C-7/16W






RECESSED INGROUND UPLIGHT



SR-2106C



SR-2103C



Product Code: SR-2103C-C6/6W

Watt: 6W

Kelvin: 3000K/4000K/5000K

Beam Angle: 25° Asy. 10°

CRI: >80

Input: AC 100-240V

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H

Control: PWM/CC

Product Code: SR-2106C-C8/8W

Watt: 8W

Kelvin: 3000K/4000K/5000K

Beam Angle: 25° Asy. 10°

CRI: >80

Input: AC 100-240V ~ 50/60Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 50,000H

Control: DMX512/CC



IP67



Cutting Size: 118mm

- CREE LED
- Die cast aluminium body, ast 304 frarie
aisi 316 frame on request)

SR-2103C-C6/6W
SR-2106C-C8/8W



RECESSED UPLIGHT



SR-3200A



SR-3200B

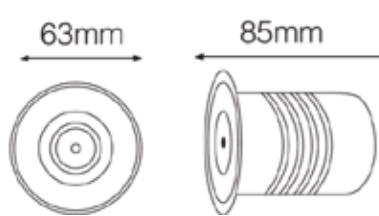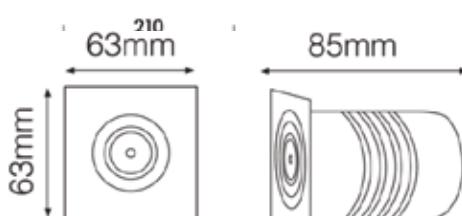

Product Code: SR-3200/1W

Watt: 1W

Kelvin: 3000K

Lumens: 100lm

Beam Angle: Narrow Beam

CRI: >80

Input: AC 100-240V ~ 50/60Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H

Product Code: SR-3200A/1W

Watt: 1W

Kelvin: 3000K

Lumens: 100lm

Beam Angle: Narrow Beam

CRI: >80

Input: AC 100-240V ~ 50/60Hz

Ambient Temperature: -25°C~50°C

Lamp Life: 30,000H



IP67



Cutting Size: 55mm

**SR-3200A
SR-3200B**

PATHWALK LIGHT



SR-4400




SR-4500

88mm



110mm



Pathway



Wall and Pathway



Product Code: SR-4400

Watt: 3W

Kelvin: 3000K

Lumens: 300lm

Beam Angle: Medium

CRI: >80

Input: AC 100-240V ~ 50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-4500

Watt: 2+1W

Kelvin: 3000K

Lumens: 300lm

Beam Angle: Medium

CRI: >80

Input: AC 200-240V ~ 50/60Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



Cutting Size: 80mm

- CREE LED
- Die cast aluminium body, ast 304 frarie
aisi 316 frame on request)

SR-4400C/3W
SR-4500C/2+1W




BOLLARDS



SR-8453 LED-200



SR-8451

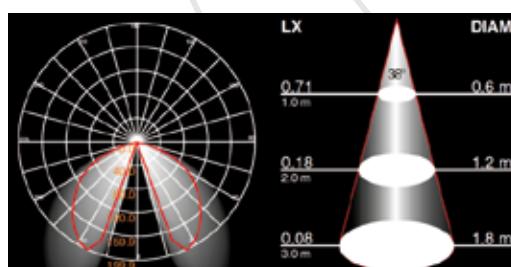

Product Code: SR-8453LED-200/1x7W

Watt: 1x1W

Kelvin: 3000K

Lumens: 400lm

Beam Angle: 38°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-8451LED-220/1x7W

Watt: 1x7W

Kelvin: 3000K

Lumens: 400lm

Beam Angle: 36°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



IP54

- CREE LED
- Die cast aluminium body and clear glass

**SR-8453LED
200/1x7W
SR-8451
220/1x7W**

BOLLARDS



Product Code: SR-5733LED-750 10x1W

Watt: 10x1W

Kelvin: 3000K

Lumens: 253lm

Beam Angle: 197°

CRI: >81

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-5733LED-220 10x1W

Watt: 10x1W

Kelvin: 3000K

Lumens: 253lm

Beam Angle: 197°

CRI: >81

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C



Lamp Life: 30,000H




- CREE LED ACRED - no driver
- Die cast aluminium body, frosted PC diffuser

**SR-5733LED
750/10x1W
SR-5733LED
220/10x1W**

BOLLARDS

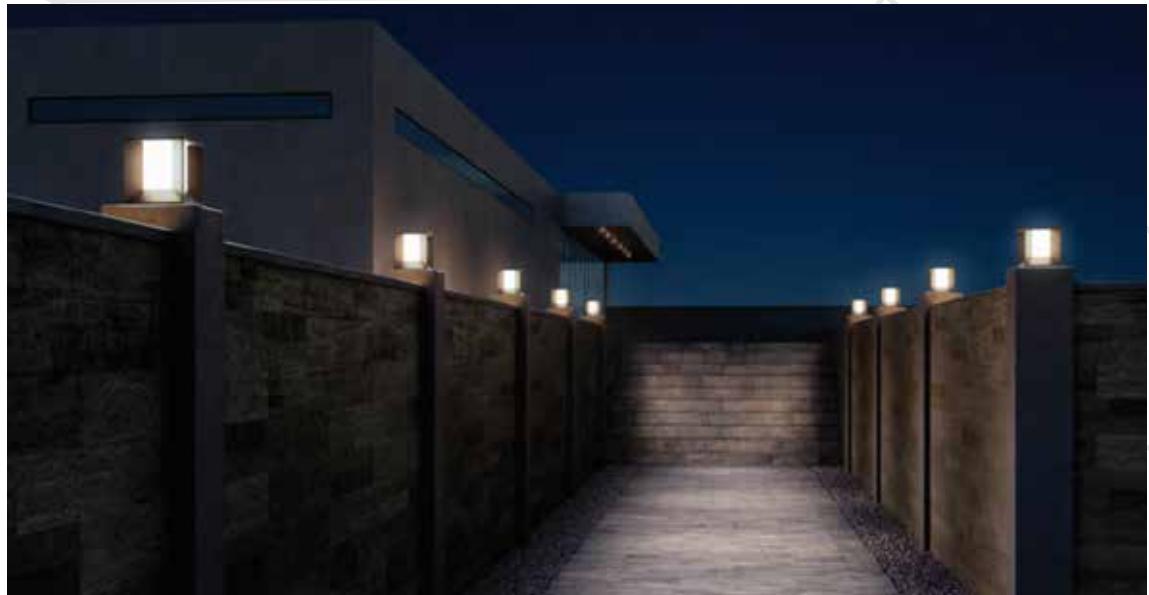

SR-1221

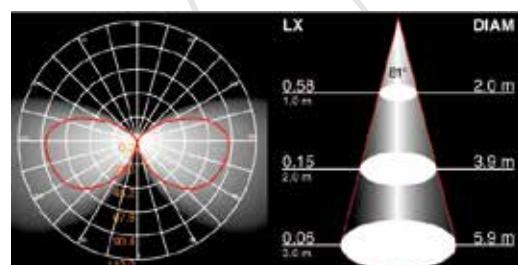

Product Code: SR-1221/18W

Watt: 18W

Kelvin: 3000K

Lumens: 737lm

Beam Angle: 81°

CRI: >84

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



IP65

- SMD LED - AC LED - no driver
- Die cast aluminium body, opal PC diffuser

SR-1221/18W

BOLLARDS





SR-8404COB-650



SR-8404COB



SR-8404COB-265

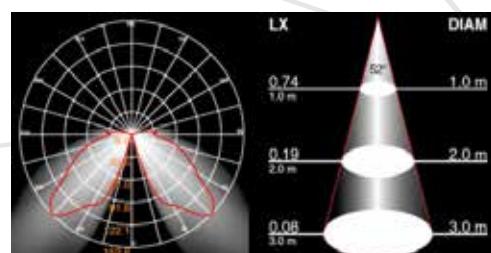

Product Code: SR-8404COB-650/1x15W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V~50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-8404COB-265/1x15W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-1221/18W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



IP54

- SMD LED
- Die cast aluminium body, clear PC diffuser

**SR-8404COB-650
SR-8404COB-265
SR-8404COB**

BOLLARDS






SR-8414COB650



SR-8414COB265



SR-8412COB

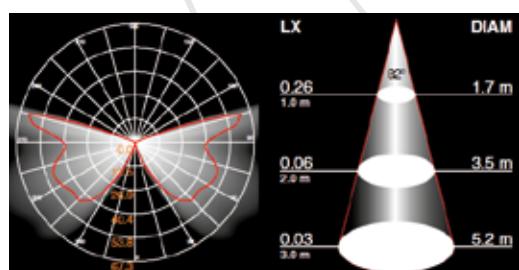

- CREE LED
- Die cast aluminium body and clear PC

**SR-8414COB650
SR-8414COB265
SR-8412COB**

Product Code: SR-8414COB650/1x15W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V~50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-8414COB-265/1x15W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H

Product Code: SR-8412COB/1x15W

Watt: 1x15W

Kelvin: 3000K

Lumens: 568lm

Beam Angle: 52°

CRI: >82

Input: AC 200-240V ~ 50Hz

Ambient Temperature: 25°C~50°C

Lamp Life: 30,000H



SPIKE LIGHT





SR7501/7501G







SR7502/7502G



SR7503/7503G



on request

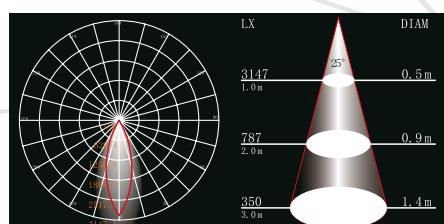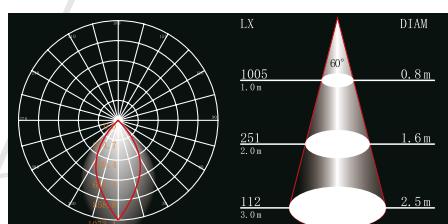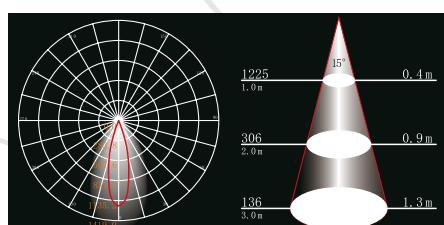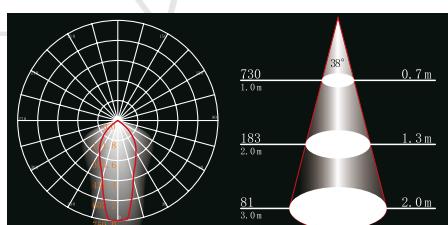

Product Code: SR-7501

Watt: 7.8W LUMILEDS

Kelvin: 3000K

Luminous flux: 375lm

Beam Angle: 15°/25°/38°/60°

CRI: 92.5

Input: AC 220-290V~50/60Hz

Power factor: 0.94

Lamp Life: 50,000H

Product Code: SR-7502

Watt: 7.8W LUMILEDS

Kelvin: 3000K

Luminous flux: 375lm

Beam Angle: 15°/25°/38°/60°

CRI: 92.5

Input: AC 220-290V~50/60Hz

Power factor: 0.94

Lamp Life: 50,000H

Product Code: SR-7503

Watt: 7.8W LUMILEDS

Kelvin: 3000K

Luminous flux: 375lm

Beam Angle: 15°/25°/38°/60°

CRI: 92.5


Input: AC 220-290V~50/60Hz

Power factor: 0.94

Lamp Life: 50,000H



IP65



- Lumileds chip
- Lifud driver
- Die cast aluminium body, clear glass
- Honey comb on request

SYMBOLS

	Foro incasso Cut out Trou d'encastrement		Dimmer incluso Dimmer Included Dimmer inclus
	Apparecchi calpestabili Walk over fitting Appareils piétonniers		Dati fotometrici Photometrical data Données photométriques
	Apparecchi carrabili Drive over fitting Pour passage véhicules		Indica il grado di protezione degli involucri (vedi pag. 8) It shows protection degree of the envelopes. (see page 8)
	Alimentatore incluso Converter included Convertisseur inclus		Grado di protezione contro gli impatti meccanici esterni (vedi pag. 8) Degree of Protection against external mechanical impact (see page 8)
	Alimentatore non incluso Converter not included Convertisseur pas inclus		Grado di protezione Glow-wire Apparecchio che resiste alla prova del filo incandescente Degree of protection Glow-wire Materials that resist the glow-wire test
	Lunghezza cavo Cable lenght Longueur du câble		

MARKS

Apparecchio in Classe II, munito di isolamento doppio o rinforzato
Fixture on Class II, with double or reinforced insulation
Appareil en Classe II, équipé d'isolation double ou renforcée

Apparecchio a bassissima tensione con trasformatore remoto
SELV fixture with remote transformer
Appareil à très basse tension avec transformateur à distance

Apparecchio adatto ad essere installato su superfici normalmente infiammabili
Fixture ready for installation on normally inflammable surfaces
Appareil pouvant être installé sur des surfaces enflammables

IP20D

1° cifra definisce la protezione
contro il contatto dei corpi solidi

1st. number indicates protection
against solids body penetration

2° cifra definisce la protezione
contro la penetrazione dei liquidi

2nd. number indicates protection
against liquid penetration

Lettera aggiuntiva indica il grado di
protezione per le persone contro
l'accesso a parti pericolose

Additional letter specifies the degree
of protection against human access
to live parts

Prima cifra First number	Seconda cifra Second number
0 non protetto not protected	0 non protetto not protected
1 protetto contro corpi solidi di al maggiore 50 mm protected against solids over a 50 mm	1 protetto contro la caduta verticale di gocce d'acqua protected against the vertical fall of water drops
2 protetto contro corpi solidi di al maggiore 12 mm protected against solids over a 12 mm	2 protetto contro la caduta verticale di gocce d'acqua 15° protected against the vertical fall of water drops 15°
3 protetto contro corpi solidi di al maggiore 2,5 mm protected against solids over a 2,5 mm	3 protetto contro la pioggia protected against rain drops
4 protetto contro corpi solidi di al maggiore 1 mm protected against solids over a 1 mm	4 protetto contro gli spruzzi d'acqua protected against splashing water
5 protetto contro la polvere protected against dust	5 protetto contro i getti d'acqua protected against jets of water
6 totalmente protetto contro la polvere entirely protected against dust	6 protetto contro le onde protected against waves
	7 protetto contro le immersioni fino a 1 mt protected against immersion 1 m depth

Lettera aggiuntiva Additional letter
A Protetto contro l'accesso con il dorsa della mano Protected against access with the back of the hand
B Protetto contro l'accesso con un dito Protected against access with a finger
C Protetto contro l'accesso con un attrezzo Protected against access with a tool
D Protetto contro l'accesso con un filo Protected against access with a wire



Tutti i prodotti SIRIOLuce che rientrano
nell'ambito di applicazione della
direttiva europea contabilità
elettromagnetica E.M.C. 2014/30/UE
e successive modifiche, soddisfano
i requisiti e recano la marcatura "CE".
All SIRIOLuce product fall within the range
of application of the European electromagnetic
compatibility E.M.C. directive 2014/30/UE
and subsequent, meet the required
specifications and bear "CE" labelling.
Tous les produits SIRIOLuce appartenant
au champ d'application de la directive
européenne compatibilité électromagnétique
E.M.C. 2014/30/UE et modification successive
remplissent les conditions prévues et portent
le marquage "CE"

SIRIO Luce reserves the rights to change components brands without notice as SIRIO Luce employs system of permanent
product improvements, it reserves the right to modify any of the products without any prior notification.

INDEX

SPOT LIGHT

CODE	PAGE
SR-7468	06
SR-2008	07
SR-2006	08
SR-213-218	09
SR-203-208	10
SR-74026	11
SR-7495/7W	12

SURFACE DOWN LIGHT

CODE	PAGE
SR-1081-ES	13
SR-1082-ES	14

RECESSED DOWNLIGHT

CODE	PAGE
SR-1073-ES	15

PANEL LED

CODE	PAGE
SR-PN008	16

RECESSED DOWNLIGHT

CODE	PAGE
SR-6331-SL	17
SR-1074ES	18

CUSTOMIZED INTERIOR SOLUTIONS

PAGE
19

OUTDOOR LIGHTING SURFACE WALL LIGHT

CODE	PAGE
SR-6156	26
SR-6155	27
SR-3210	28
SR-2553 LED	29
SR-2542	30
SR-2841 COB	31
SR-2851 COB	31
SR-2300	32
SR-2310A	32
SR-2200	33
SR-9320	34
SR-9310	34
SR-9300	34
SR-1121A	35
SR-1122A	35
SR-2772LED	36
SR-2771LED	36

SURFACE CEILING LIGHT

CODE	PAGE
SR-5764-LED	37
SR-5774-LED	37
SR-5683-LED	38
SR-5693-LED	38

FLOOD LIGHT

CODE	PAGE
SR-TGD-28006	39
SR-TGD-28007	39
SR-TGD-28008	39
SR-TGD-28008B	39
SR-TGD-28118	40
SR-TGD-28118B	40
SR-TGD-28718	40
SR-TGD-R715	40
SR-1260UB-50	41
SR-1260UB-30	41
SR-1260UB-30F	41

RECESSED LINEARLIGHT

CODE	PAGE
SR-2306	42
SR-2306	43

RECESSED UP LIGHT

CODE	PAGE
SR-2130C	44
SR-2130S	44
SR-2106A-6/7W	45
SR-2106B-6/12W	45
SR-2110C-6/14W	46
SR-2110C-7/16W	46

RECESSED INGROUD UP LIGHT

CODE	PAGE
SR-2103C-C6/6W	47
SR-2106C-C8/8W	47

RECESSED UP LIGHT

CODE	PAGE
SR-3200A	48
SR-3200B	48

PATHWALK LIGHT


CODE	PAGE
SR-4400C/3W	49
SR-4500C/2+1W	49

BOLLARDS

CODE	PAGE
SR-8453LED200	50
SR-8451	50
SR-5733LED	
750/10x1W	51
SR-5733LED	
220/10x1W	51
SR-1221/18W	52
SR-8404COB-650	53
SR-8404COB-265	53
SR-8404COB-650	53
SR-8414COB650	54
SR-8414COB265	54
SR-8414COB	54

SPIKE LIGHT

CODE	PAGE
SR-7501	55
SR-7502	55
SR-7503	55
7501G-7502G-7503G	

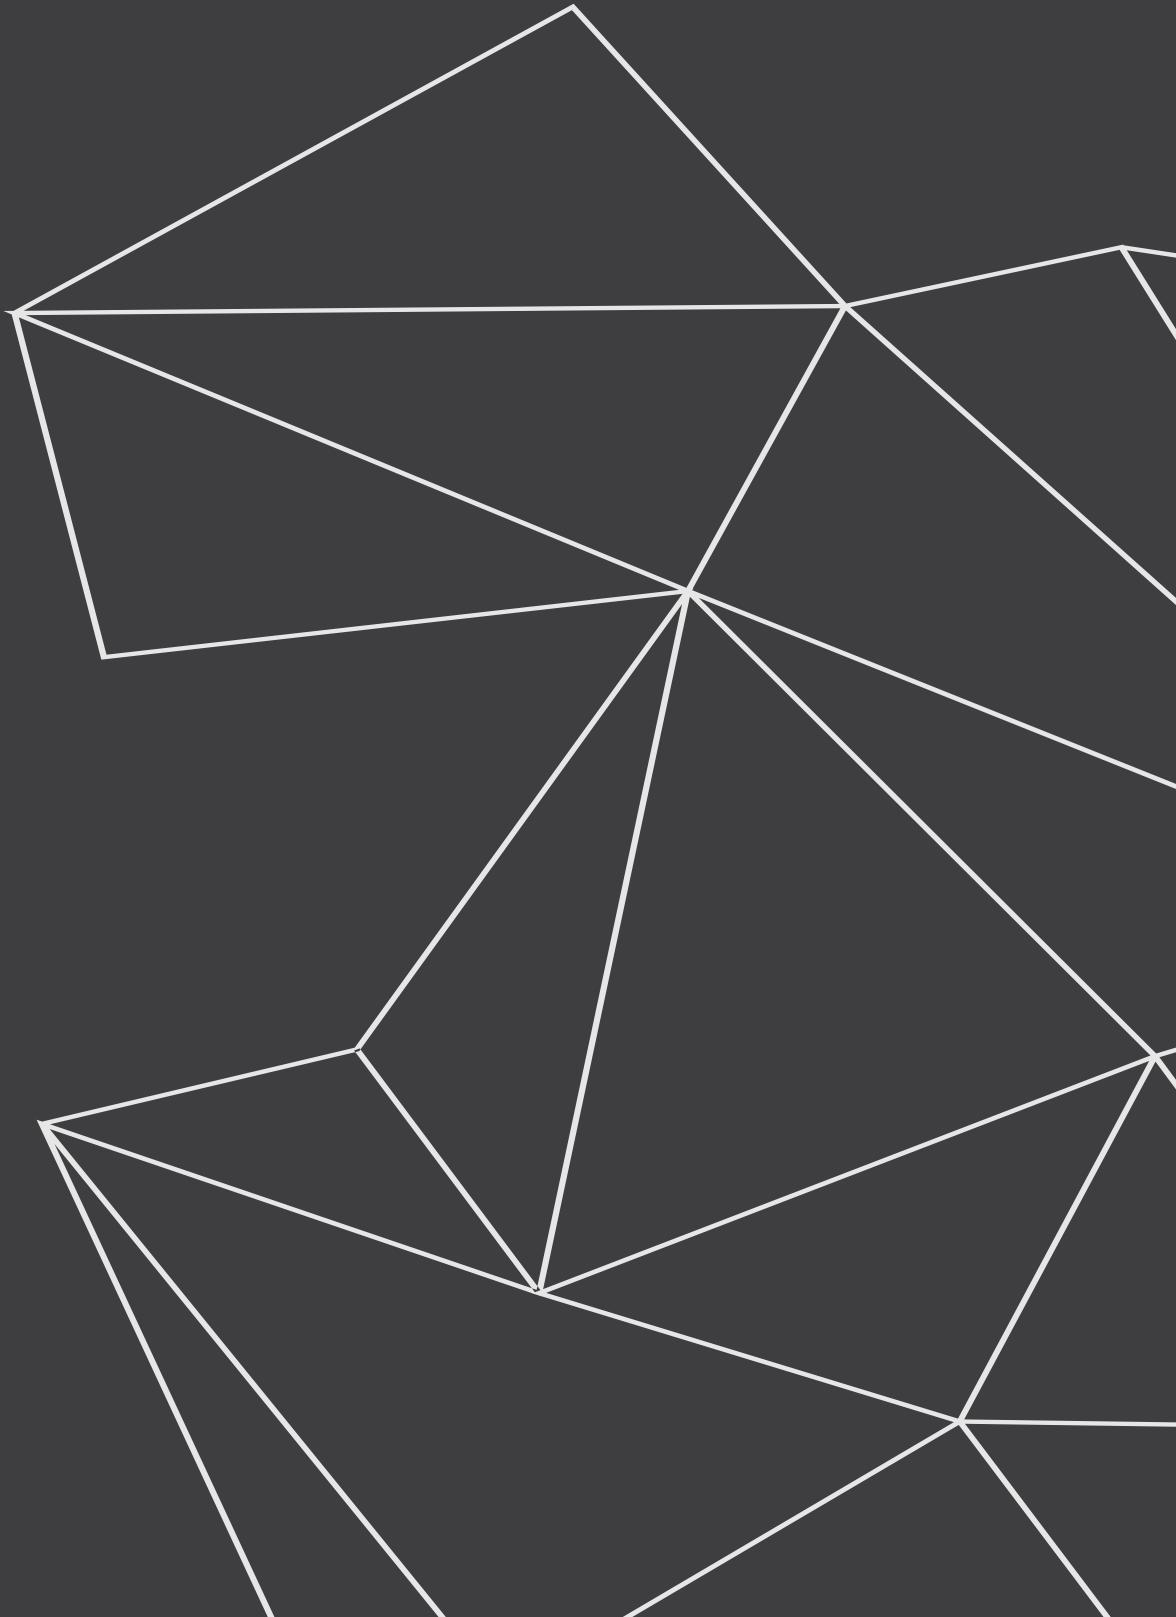

SIRIO Luce
Italian Style

EUROPA:
ITALY
Via Ghisolfa
80/e 20010
Cornaredo (MI)
www.sirioluce.com

info@sirioluce.com

SIRIOLUCE
Italian Style